


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

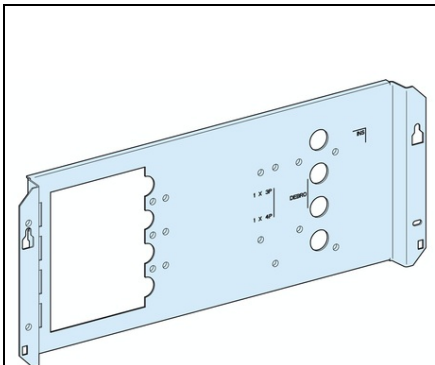

SCHNEIDER PRISMA PLUS-G SISTEM- PLACA DE MONT. PT. NSX250 FIX ORIZONTAL - MOTOR - MANER

gama Prisma
compatibilitate gama Prisma G
tip produs sau componenta Placa de montare
categorie de accesorii/piese separate Installation accessory
dispozitiv instalat Compact fix INS250 - cda: lateral handle - vertical instalare - Compact
fix INV250 - cda: lateral handle - vertical instalare - Compact fix NSX100...160 fara
protectie punere la pamant - cda: mecanism motor - orizontal instalare - Compact
conectare NSX100...160 fara protectie punere la pamant - cda: comutare - orizontal
instalare - Compact fix NSX250 fara protectie punere la pamant - cda: mecanism motor -
orizontal instalare - Compact conectare NSX250 fara protectie punere la pamant - cda:
comutare - orizontal instalare
descrierea polilor 1 x 3P fix NSX100...160 orizontal instalare - 1 x 4P fix NSX100...160
orizontal instalare - 1 x 3P fix NSX250 orizontal instalare - 1 x 4P fix NSX250 orizontal
instalare - 1 x 3P fix INS250 vertical instalare - 1 x 4P fix INS250 vertical instalare - 1 x
3P fix INV250 vertical instalare - 1 x 4P fix INV250 vertical instalare - 1 x 3P conectare
NSX100...160 orizontal instalare - 1 x 4P conectare NSX100...160 orizontal instalare - 1
x 3P conectare NSX250 orizontal instalare - 1 x 4P conectare NSX250 orizontal instalare
installation description Carcasa de podea 600 mm - Carcasa cu montare pe perete 600
mm - Floor-standing enclosure + duct 600 + 300 mm - Wall-mounted enclosure + duct
600 + 300 mm
numar de module verticale (50 mm) 4 moduleNSX100...160 fara protectie punere la
pamant , direct with long terminal shield in 600 + 300 mm floor-standing enclosure +
duct sus sau jos - 4 moduleNSX100...160 fara protectie punere la pamant , direct with
long terminal shield in 600 + 300 mm wall-mounted enclosure + duct sus sau jos - 4
moduleNSX250 fara protectie punere la pamant , direct with long terminal shield in 600
+ 300 mm floor-standing enclosure + duct sus sau jos - 4 moduleNSX250 fara protectie
punere la pamant , direct with long terminal shield in 600 + 300 mm wall-mounted
enclosure + duct sus sau jos - 8 moduleINS250, direct with long terminal shield in 600
mm carcasa de podea sus sau jos - 8 moduleINS250, direct with long terminal shield in
600 mm carcasa cu montare pe perete sus sau jos - 8 moduleINV250, direct with long
terminal shield in 600 mm carcasa de podea sus sau jos - 8 moduleINV250, direct with
long terminal shield in 600 mm carcasa cu montare pe perete sus sau jos
Condition of using cable tie Need additional plate (2 orizontal - Need additional plate (1
vertical
inaltime 150 mm
greutate produs 0,96 kg
finisaj suprafata Mat - Smooth
tratament protector Tratare prin electroforeza si praf de poliester epoxidic, polimerizat
puternic
culoare Alb (RAL 9001)
standarde IEC 61439-2
certificari produs ASEFA
Stare oferta sustenabila Produs Green Premium
Regulamentul REACH Declaratia REACH
Conform REACH fara SVHC Da
Directiva RoHS UE Not applicable, out of EU RoHS legal scope
Fara metale grele toxice Da
Fara mercur Da
Informatii privind scutirea de la RoHS Da
Regulamentul RoHS Declaratia RoHS Declaratia proactiva RoHS (in afara domeniului de
aplicare a RoHS)
Raport de mediu Profilul ambiental al produsului
Profil circularitate Nu sunt necesare operatii de reciclare speciale
Garantie 18 luni
Pret: 250,43 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/prisma-plus-g-sistem-placa-de-mont-pt-nsx250-fix-orizontal-motor-maner-101816>