


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

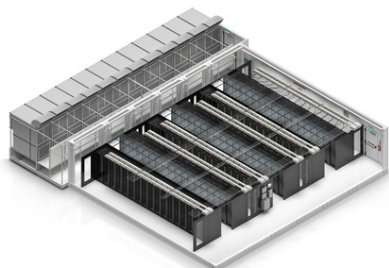

**SCHNEIDER PREFABRICATED IT DATA HALL 495W 102 RACKS, AIR
ECON COOLING, BUSWAY 400V/50HZ**

Denumire model Prefabricated IT Data Hall 495W 102 Racks, Air Econ Cooling, Busway 400V/50Hz

Include Manual de utilizare

Timp de livrare standard Cda speciala - Intrebati care este timpul de livrare fixat

Energie configurata 495000

Tensiune nominala la iesire 400 3 Faz

kW per rack 4.8 KW

Tip PDU Contorizat

Capacitate amperi PDU 16.0 A

Derivatie Bypass static extern

Frecventa de iesire (sincronizata cu alimentarea de la retea) 50 Hz - programabil +/- 0,5 / 1 / 2 / 4 / 6 / 8%

Factor de varf Nelimitat

Tip forma de unda Unda sinusoidala

Frecventa de intrare 50 Hz - programabil +/- 0,5 / 1 / 2 / 4 / 6 / 8%

Conexiuni de intrare Cablu rigid 4 fire (3 Faz + G)

Interval tensiune de intrare pentru operatii principale 320 - 498 (400V) V

Interval reglabil al tensiunii de intrare pentru functionarea alimentarii de la retea 320 - 498 (400V) V V

Tip de acumulator Fara baterie interna - utilizeaza sistemul de baterie extern

Inaltime maxima 3600.0 mm

Latime maxima 16100.0 mm

Adancime maxima 18600.0 mm

Inaltime transport 3600.0 mm

Latime de transport 3200.0 mm

Adancime transport 13700.0 mm

Inaltime rack 42 U

Spatiu liber rack 4284 U

Numar de rack-uri 102

Culoare Alb

Zgomot sonor la 1 metru de suprafata unitatii 0.000 dB

Pret: 0,00 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/prefabricated-it-data-hall-495w-102-racks-air-econ-cooling-busway-400v-50hz-102519>