



IEK MOTOR ELECTRIC TRIFAZIC ASINCRON AIR 56A2 380V 0,18KW 3000R./MIN.
1081

Motor electric asincron cu motnraj pe stativ.

Motorul este fabricat in Japonia si are garantie 3 ani. Timp de exploatare 10 ani.

In gama exista inca doua tipuri de montaj - cu flansa si flansa+stativ

Grad de protectie IP55

Numar de rotatii: 3000 de rotatii pe minut

Temperatura de functionare -45 ... + 40 ° C

Acest tip de motor poate fi comandat direct sau stea triunghi.

Pentru alimentarea monofazata este necesara utilizarea celor doi condensatori, unul pentru pornire si unul pentru functionare continua.

Tabel selectie condensatori :

Produs

Denumire

Condensator de functionare
(microfarad)

Condensator de pornire min. - max.
(microfarad)

| | |
|----------------------|--|
| DRV056-A2-000-2-3010 | Motor electric trifazat asincron AIR 56A2 380V 0,18KW 3000r./min. 1081 |
| DRV056-A4-000-1-1510 | Motor electric trifazat asincron AIR 56A4 380V 0,12KW 1500r./min. 1081 |
| DRV056-B2-000-3-3010 | Motor electric trifazat asincron AIR 56B2 380V 0,25KW 3000r./min. 1081 |
| DRV056-B4-000-2-1510 | Motor electric trifazat asincron AIR 56B4 380V 0,18KW 1500r./min. 1081 |
| DRV063-A2-000-4-3010 | Motor electric trifazat asincron AIR 63A2 380V 0,37KW 3000r./min. 1081 |
| DRV063-A4-000-3-1510 | Motor electric trifazat asincron AIR 63A4 380V 0,25KW 1500r./min. 1081 |
| DRV063-A6-000-2-1010 | Motor electric trifazat asincron AIR 63A6 380V 0,18KW 1000r./min. 1081 |
| DRV063-B2-000-5-3010 | Motor electric trifazat asincron AIR 63B2 380V 0,55KW 3000r./min. 1081 |
| DRV063-B4-000-4-1510 | Motor electric trifazat asincron AIR 63B4 380V 0,37KW 1500r./min. 1081 |
| DRV063-B6-000-3-1010 | Motor electric trifazat asincron AIR 63B6 380V 0,25KW 1000r./min. 1081 |
| DRV071-A2-000-8-3010 | Motor electric trifazat asincron AIR 71A2 380V 0,75KW 3000r./min. 1081 |
| DRV071-A4-000-5-1510 | Motor electric trifazat asincron AIR 71A4 380V 0,55KW 1500r./min. 1081 |
| DRV071-A6-000-4-1010 | Motor electric trifazat asincron AIR 71A6 380V 0,37KW 1000r./min. 1081 |
| DRV071-A8-000-2-0710 | Motor electric trifazat asincron AIR 71A8 380V 0,18KW 750r./min. 1081 |
| DRV071-B2-001-1-3010 | Motor electric trifazat asincron AIR 71B2 380V 1,1KW 3000r./min. 1081 |
| DRV071-B4-000-7-1510 | Motor electric trifazat asincron AIR 71B4 380V 0,75KW 1500r./min. 1081 |
| DRV071-B6-000-5-1010 | Motor electric trifazat asincron AIR 71B6 380V 0,55KW 1000r./min. 1081 |
| DRV080-A2-001-5-3010 | Motor electric trifazat asincron AIR 80A2 380V 1,5KW 3000r./min. 1081 |
| DRV080-A4-001-1-1510 | Motor electric trifazat asincron AIR 80A4 380V 1,1KW 1500r./min. 1081 |
| DRV080-A6-000-7-1010 | Motor electric trifazat asincron AIR 80A6 380V 0,75KW 1000r./min. 1081 |
| DRV080-A8-000-4-0710 | Motor electric trifazat asincron AIR 80A8 380V 0,37KW 750r./min. 1081 |
| DRV080-B2-002-2-3010 | Motor electric trifazat asincron AIR 80B2 380V 2,2KW 3000r./min. 1081 |
| DRV080-B4-001-5-1510 | Motor electric trifazat asincron AIR 80B4 380V 1,5KW 1500r./min. 1081 |
| DRV080-B6-001-1-1010 | Motor electric trifazat asincron AIR 80B6 380V 1,1KW 1000r./min. 1081 |
| DRV080-B8-000-5-0710 | Motor electric trifazat asincron AIR 80B8 380V 0,55KW 750r./min. 1081 |
| DRV090-B8-001-1-0710 | Motor electric trifazat asincron AIR 90LB8 380V 1,1KW 750r./min. 1081 |
| DRV090-L2-003-0-3010 | Motor electric trifazat asincron AIR 90L2 380V 3KW 3000r./min. 1081 |
| DRV090-L4-002-2-1510 | Motor electric trifazat asincron AIR 90L4 380V 2,2KW 1500r./min. 1081 |
| DRV090-L6-001-5-1010 | Motor electric trifazat asincron AIR 90L6 380V 1,5KW 1000r./min. 1081 |
| DRV090-L8-000-7-0710 | Motor electric trifazat asincron AIR 90LA8 380V 0,75KW 750r./min. 1081 |
| DRV100-L2-005-5-3010 | Motor electric trifazat asincron AIR 100L2 380V 5,5KW 3000r./min. 1081 |
| DRV100-L4-004-0-1510 | Motor electric trifazat asincron AIR 100L4 380V 4KW 1500r./min. 1081 |
| DRV100-L6-002-2-1010 | Motor electric trifazat asincron AIR 100L6 380V 2,2KW 1000r./min. 1081 |

DRV100-L8-001-5-0710 Motor electric trifazat asincron AIR 100L8 380V 1,5KW 750r./min. 1081
 DRV100-S2-004-0-3010 Motor electric trifazat asincron AIR 100S2 380V 4KW 3000r./min. 1081
 DRV100-S4-003-0-1510 Motor electric trifazat asincron AIR 100S4 380V 3KW 1500r./min. 1081
 DRV112-B6-004-0-1010 Motor electric trifazat asincron AIR 112MB6 380V 4KW 1000r./min. 1081
 DRV112-B8-003-0-0710 Motor electric trifazat asincron AIR 112MB8 380V 3KW 750r./min. 1081
 DRV112-M4-005-5-1510 Motor electric trifazat asincron AIR 112M4 380V 5,5KW 1500r./min. 1081
 DRV112-M6-003-0-1010 Motor electric trifazat asincron AIR 112MA6 380V 3KW 1000r./min. 1081
 DRV112-M8-002-2-0710 Motor electric trifazat asincron AIR 112MA8 380V 3KW 750r./min. 1081
 DRV132-M8-005-5-0710 Motor electric trifazat asincron AIR 132M8 380V 5,5KW 1500r./min. 1081
 DRV132-S6-005-5-1010 Motor electric trifazat asincron AIR 132S6 380V 3KW 1500r./min. 1081
 DRV132-S8-004-0-0710 Motor electric trifazat asincron AIR 132S8 380V 3KW 1500r./min. 1081

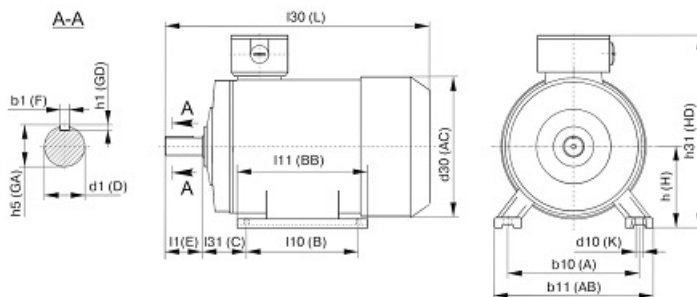


Рисунок 1. Размеры двигателей монтажного исполнения IM 1081.

Таблица 1
 Размеры двигателей монтажного исполнения IM 1081

| Типо-размер | Количество полюсов | Габаритные размеры, мм | | | Типо-размер | Количество полюсов | Габаритные размеры, мм | | |
|-------------|--------------------|------------------------|----------|----------|-------------|--------------------|------------------------|----------|----------|
| | | l30 (L) | h31 (HD) | d30 (AC) | | | l30 (L) | h31 (HD) | d30 (AC) |
| AIP56A | 2, 4 | 210 | 150 | 120 | AIP132S | 4, 6, 8 | 475 | 325 | 283 |
| AIP56B | | 210 | 150 | 120 | AIP132M | 2, 4, 6, 8 | 515 | 325 | 283 |
| AIP63A | 2, 4, 6 | 230 | 170 | 140 | AIP160S | 2 | 635 | 375 | 330 |
| AIP63B | | 230 | 170 | 140 | | 4, 6, 8 | 635 | 375 | 330 |
| AIP71A | 2, 4, 6 | 290 | 175 | 155 | AIP160M | 2 | 679 | 375 | 330 |
| AIP71B | 2, 4, 6, 8 | 290 | 175 | 155 | | 4, 6, 8 | 679 | 375 | 330 |
| AIP80A | 2, 4, 6, 8 | 310 | 215 | 176 | AIP180S | 2 | 700 | 435 | 380 |
| AIP80B | | 335 | 215 | 176 | | 4 | 700 | 435 | 380 |
| AIP90LA | 2, 4, 6, 8 | 350 | 245 | 185 | AIP180M | 2 | 738 | 435 | 380 |
| AIP90LB | 8 | 350 | 245 | 185 | | 4, 6, 8 | 738 | 435 | 380 |
| AIP100S | 2, 4 | 385 | 250 | 215 | AIP200M | 2 | 780 | 475 | 420 |
| AIP100L | 2, 4, 6, 8 | 415 | 250 | 215 | | 4, 6, 8 | 810 | 475 | 420 |
| AIP112MA | 2, 4, 6, 8 | 435 | 280 | 240 | AIP200L | 2 | 780 | 475 | 420 |
| AIP112MB | 6, 8 | 435 | 280 | 240 | | 4, 6, 8 | 810 | 475 | 420 |

Dimensiuni de gabarit in functie de model:

Pret: 461,86 LEI (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/motor-electric-trifazic-asincron-air-56a2-380v-0-18kw-3000r-min-1081>