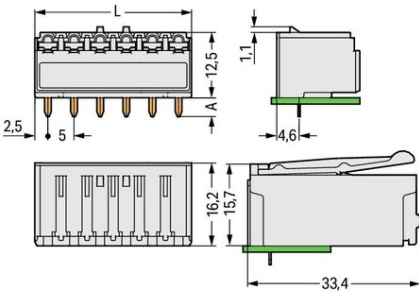


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

 Technical drawing of the WAGO THT Female Header. The drawing includes three views: a top view showing the 6 pins with a pitch of 5 mm and a total length of 30 mm; a side view showing the header height of 17.2 mm and a pin height of 13.6 mm; and a front view showing the header width of 15.4 mm and a pin width of 3.6 mm. The header is light gray and has a 0.4 x 1.3 mm solder pin.	<u>WAGO THT FEMALE HEADER; 0.4 X 1.3 MM SOLDER PIN; ANGLED; PIN SPACING 5 MM; 6-POLE; LIGHT GRAY</u> Ratings per: IEC/EN 60664-1; Tensiune nominala (III/3): 250; V Tensiune nominala de supratensiune (III/3): 4; kV Tensiune nominala (III/2): 320; V Tensiune nominala de supratensiune (III/2): 4; kV Tensiune nominala (II/2): 630; V Tensiune nominala de supratensiune (II/2): 4; kV Curent nominal: 16; A Legend (ratings): (III / 2) %TM Overvoltage category III / Pollution degree 2; Tensiune nominala UL (Use Group B): 300; V Curent nominal UL (Use Group B): 15; A Tensiune nominala UL (Use Group D): 300; V Curent nominal UL (Use Group D): 10; A Certificari: UL 1059; Numar poli: 6; Total number of potentials: 6; Numar tipuri de conexiuni: 1; Numar nivele: 1; Distanta intre pini: 5 mm / 0.197 inch; Latime: 30 mm / 1.181 inch; Inaltime: 17,2 mm / 0.677 inch; Inaltime de la fata: 13,6 mm / 0.535 inch; Adancime: 15,4 mm / 0.606 inch; Lungimea pinului de contact: 3,6; mm Solder pin dimensions: 0,4 x 1,3 mm; Diametrul de gaurire cu toleranta: 1,5 (+0,1) mm; Tip contact (pluggable connector): Conector mama/priza; Connector (connection type): for PCB; Mismatching protection: No; Mating direction to the PCB: 0; ° PCB contact: THT; Culoare: light gray; Material group: I; Material izolator: Polyphthalamide (PPA GF); Flammability class per UL94: V0; Contact material: Copper alloy; Contact plating: tin-plated; Fire load: 0,138; MJ Greutate: 5,9; g Temperatura lucru: -60 ... +100 °C; Product Group: 26 (picoMAX); Tip ambalare: BOX; Tara de origine: DE; GTIN: 4050821163725; Customs tariff number: 85366990990; Pret: 22,39 lei (TVA inclus) Detalii online: https://www.materialeelectrice.ro/tht-female-header-0-4-x-1-3-mm-solder-pin-angled-pin-spacing-5-mm-6-pole-light-gray-130332
---	---