


Furnizor: **Sc Trivolt Distribution SRL**
 Reg. com.: J23/3300/2016
 CIF: RO36421140
 Adresa: Strada Apusului nr 3 (primul
 sens giratoriu Tehodor Pallady-
 Autostrada Soarelui), Catelu, Ilfov
 Banca: BRD
 IBAN: RO34BRDE441SV13182234410

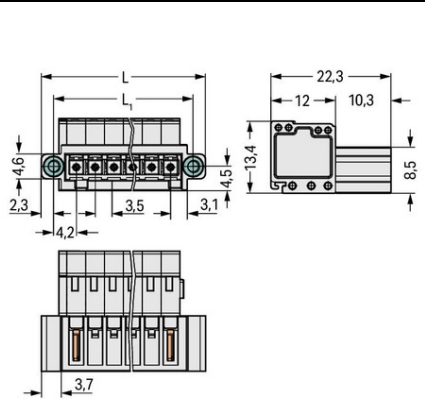

**WAGO 1-CONDUCTOR MALE CONNECTOR; 100% PROTECTED
 AGAINST MISMATING; THREADED FLANGE; 1.5 MM²; PIN SPACING
 3.5 MM; 12-POLE; 1,50 MM²; LIGHT GRAY**

Ratings per: IEC/EN 60664-1;
 Tensiune nominala (III/3): 160; V
 Tensiune nominala de supratensiune (III/3): 2,5; kV
 Tensiune nominala (III/2): 160; V
 Tensiune nominala de supratensiune (III/2): 2,5; kV
 Tensiune nominala (II/2): 320; V
 Tensiune nominala de supratensiune (II/2): 2,5; kV
 Curent nominal: 10; A
 Legend (ratings): (III / 2) \hat{a} %TM Overvoltage category III / Pollution degree 2;
 Tensiune nominala UL (Use Group B): 300; V
 Curent nominal UL (Use Group B): 10; A
 Tensiune nominala UL (Use Group D): 300; V
 Curent nominal UL (Use Group D): 10; A
 Certificari: UL 1059;
 Tensiune nominala CSA (Use Group B): 300; V
 Curent nominal CSA (Use Group B): 10; A
 Tensiune nominala CSA (Use Group D): 300; V
 Curent nominal CSA (Use Group D): 10; A
 Tehnologie conexiune: CAGE CLAMP®;
 Tip actionare: Operating tool;
 Solid conductor: 0,08 ... 1,5 mm² / 28 ... 14 AWG;
 Fine-stranded conductor: 0,08 ... 1,5 mm² / 28 ... 14 AWG;
 Fine-stranded conductor; with insulated ferrule: 0.25 ... 1.5 mm²;
 Fine-stranded conductor; with uninsulated ferrule: 0.25 ... 1.5 mm²;
 Strip length: 6 ... 7 mm / 0.24 ... 0.28 inch;
 Numar poli: 12;
 Numar total de conexiuni: 12;
 Total number of potentials: 12;
 Numar tipuri de conexiuni: 1;
 Numar nivele: 1;
 Note (conductor cross-section): Terminating 1.5 mm² conductors is possible; however insulation diameter does not allow clamping units to be terminated in a row.;
 Conductor entry direction to mating direction: 0; °
 Distanta intre pini: 3.5 mm / 0.138 inch;
 Latime: 51.5 mm / 2.028 inch;
 Inaltime: 13.4 mm / 0.528 inch;
 Adancime: 22.3 mm / 0.878 inch;
 Tip contact (pluggable connector): Conector tata/fisa;
 Connector (connection type): for conductors;
 Mismatching protection: Yes;
 Locking of plug-in connection: Threaded flange;
 Culoare: light gray;
 Material group: I;
 Material izolator: Polyamide 66 (PA 66);
 Flammability class per UL94: V0;
 Clamping spring material: Chrome nickel spring steel (CrNi);
 Contact material: Cupru electrolitic (ECu);
 Contact plating: tin-plated;
 Fire load: 0,204; MJ
 Greutate: 10,4; g
 Temperatura lucru: -60 ... +100 °C;
 Product Group: 3 (Multi Conn. System);
 Tip ambalare: BOX;
 Tara de origine: DE;
 GTIN: 4045454695163;
 Customs tariff number: 85366990990;
 Pret: 47,90 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/1-conductor-male-connector-100-protected-against-mismatching-threaded-flange-1-5-mm2-pin-spacing-3-5-mm-12-pole-1-50-mm2-light-gray-130932>