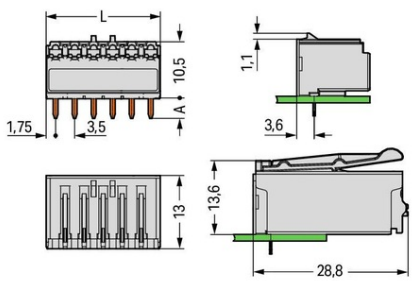


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

	<p>WAGO THR FEMALE HEADER; 0.4 X 0.9 MM SOLDER PIN; ANGLED; PIN SPACING 3.5 MM; 2-POLE; LIGHT GRAY</p> <p>Ratings per: IEC/EN 60664-1; Tensiune nominala (III/3): 160; V Tensiune nominala de supratensiune (III/3): 2,5; kV Tensiune nominala (III/2): 160; V Tensiune nominala de supratensiune (III/2): 2,5; kV Tensiune nominala (II/2): 320; V Tensiune nominala de supratensiune (II/2): 2,5; kV Curent nominal: 10; A Legend (ratings): (III / 2) % Overvoltage category III / Pollution degree 2; Tensiune nominala UL (Use Group B): 300; V Curent nominal UL (Use Group B): 10; A Tensiune nominala UL (Use Group D): 300; V Curent nominal UL (Use Group D): 10; A Certificari: UL 1059; Numar poli: 2; Total number of potentials: 2; Numar tipuri de conexiuni: 1; Numar nivele: 1; Distanta intre pini: 3,5 mm / 0.138 inch; Latime: 7 mm / 0.276 inch; Inaltime: 14 mm / 0.551 inch; Inaltime de la fata: 11,6 mm / 0.457 inch; Adancime: 13 mm / 0.512 inch; Lungimea pinului de contact: 2,4; mm Solder pin dimensions: 0,4 x 0,9 mm; Diametru placat prin gaura (THR): 1,1 (+0,1) mm; Tip contact (pluggable connector): Conector mama/priza; Connector (connection type): for PCB; Mismatching protection: No; Mating direction to the PCB: 0; ° PCB contact: THR; Culoare: light gray; Material group: I; Material izolator: Polyphthalamide (PPA GF); Flammability class per UL94: V0; Contact material: Copper alloy; Contact plating: tin-plated; Fire load: 0,024; MJ Greutate: 1,1; g Temperatura lucru: -60 ... +100 °C; Tip ambalare: BOX; Tara de origine: DE; GTIN: 4055143250405; Customs tariff number: 85366990990; Pret: 9,67 lei (TVA inclus)</p> <p>Detalii online: https://www.materialelectrice.ro/thr-female-header-0-4-x-0-9-mm-solder-pin-angled-pin-spacing-3-5-mm-2-pole-light-gray-131117</p>
---	---