


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

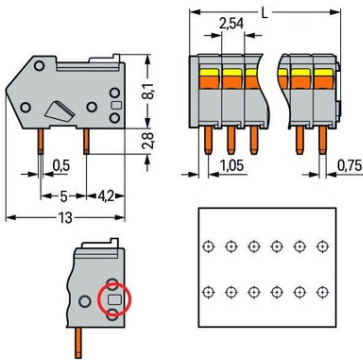

**WAGO PCB TERMINAL BLOCK; LOCKING SLIDES; 0.5 MM²; PIN
SPACING 2.54 MM; 2-POLE; CAGE CLAMP[®]; 0.50 MM²; BLUE**

Ratings per: IEC/EN 60664-1;
Tensiune nominala (III/3): 80; V
Tensiune nominala de supratensiune (III/3): 2,5; kV
Tensiune nominala (III/2): 160; V
Tensiune nominala de supratensiune (III/2): 2,5; kV
Tensiune nominala (II/2): 320; V
Tensiune nominala de supratensiune (II/2): 2,5; kV
Curent nominal: 6; A
Legend (ratings): (III / 2) $\hat{a}\%$ ™ Overvoltage category III / Pollution degree 2;
Tensiune nominala UL (Use Group B): 150; V
Curent nominal UL (Use Group B): 4; A
Certificari: UL 1059;
Tensiune nominala CSA (Use Group B): 150; V
Curent nominal CSA (Use Group B): 4; A
Tehnologie conexiune: CAGE CLAMP[®];
Tip actionare: Slider;
Solid conductor: 0,08 ... 0,5 mm² / 28 ... 20 AWG;
Fine-stranded conductor: 0,08 ... 0,5 mm² / 28 ... 20 AWG;
Fine-stranded conductor; with insulated ferrule: 0,25 mm²;
Fine-stranded conductor; with uninsulated ferrule: 0,25 mm²;
Strip length: 5 ... 6 mm / 0.2 ... 0.24 inch;
Conductor connection direction to PCB: 40; °
Numar poli: 2;
Numar total de conexiuni: 2;
Total number of potentials: 2;
Numar tipuri de conexiuni: 1;
Numar nivele: 1;
Note (conductor cross-section): Terminating 0.75 mm²/18 AWG conductors is possible; however insulation diameter allows only every other clamping unit to be terminated with this conductor size.;
Distanta intre pini: 2,54 mm / 0.1 inch;
Latime: 6,58 mm / 0.259 inch;
Inaltime: 10,9 mm / 0.429 inch;
Inaltime de la fata: 8,1 mm / 0.319 inch;
Adancime: 13 mm / 0.512 inch;
Lungimea pinului de contact: 2,8; mm
Solder pin dimensions: 0,5 x 0,75 mm;
Diametrul de gaurire cu toleranta: 1,1 (+0,1) mm;
PCB contact: THT;
Solder pin arrangement: over the entire terminal strip (in-line);
Number of solder pins per potential: 2;
Culoare: blue;
Material group: I;
Material izolator: Polyamide 66 (PA 66);
Flammability class per UL94: V0;
Clamping spring material: Chrome nickel spring steel (CrNi);
Contact material: Cupru electrolitic(ECu);
Contact plating: tin-plated;
Fire load: 0,011; MJ
Greutate: 0,7; g
Temperatura lucru: -60 ... +105 °C;
Product Group: 4 (Printed Circuit);
Tip ambalare: BOX;
Tara de origine: PL;
GTIN: 4044918876940;
Customs tariff number: 85369010000;
Pret: 5,25 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/pcb-terminal-block-locking-slides-0-5-mm2-pin-spacing-2-54-mm-2-pole-cage-clamp-0-50-mm2-blue-131836>