


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

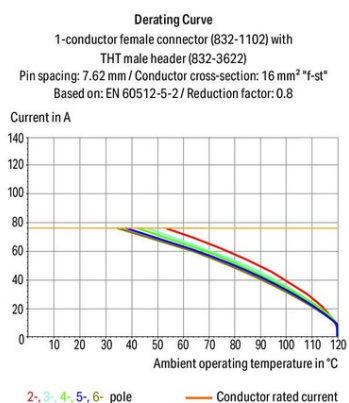

WAGO THT MALE HEADER; 1.2 X 1.2 MM SOLDER PIN; STRAIGHT;
100% PROTECTED AGAINST MISMATING; SILVER-PLATED
CONTACTS; PIN SPACING 10.16 MM; 6-POLE; LIGHT GRAY

Ratings per: IEC/EN 60664-1;
Tensiune nominala (III/3): 800; V
Tensiune nominala de supratensiune (III/3): 8; kV
Tensiune nominala (III/2): 1000; V
Tensiune nominala de supratensiune (III/2): 8; kV
Tensiune nominala (II/2): 1000; V
Tensiune nominala de supratensiune (II/2): 8; kV
Curent nominal: 76; A
Legend (ratings): (III / 2) \hat{a} %^o™ Overvoltage category III / Pollution degree 2;
Tensiune nominala UL (Use Group B): 300; V
Curent nominal UL (Use Group B): 66; A
Tensiune nominala UL (Use Group C): 300; V
Curent nominal UL (Use Group C): 66; A
Tensiune nominala UL (Use Group D): 600; V
Curent nominal UL (Use Group D): 5; A
Certificari: UL 1059;
Tensiune nominala CSA (Use Group B): 300; V
Curent nominal CSA (Use Group B): 66; A
Tensiune nominala CSA (Use Group C): 300; V
Curent nominal CSA (Use Group C): 66; A
Tensiune nominala CSA (Use Group D): 600; V
Curent nominal CSA (Use Group D): 5; A
Numar poli: 6;
Total number of potentials: 6;
Numar tipuri de conexiuni: 1;
Numar nivele: 1;
Distanta intre pini: 10.16 mm / 0.4 inch;
Latime: 62.26 mm / 2.451 inch;
Inaltime: 20.5 mm / 0.807 inch;
Inaltime de la fata: 16.5 mm / 0.65 inch;
Adancime: 32 mm / 1.26 inch;
Lungimea pinului de contact: 4; mm
Solder pin dimensions: 1.2 x 1.2 mm;
Diametrul de gaurire cu toleranta: 1.7 (+0.1) mm;
Tip contact (pluggable connector): Conector tata/fisa;
Connector (connection type): for PCBs;
Mismating protection: Yes;
Mating direction to the PCB: 180; °
PCB contact: THT;
Solder pin arrangement: over the entire male connector, in line;
Number of solder pins per potential: 3;
Culoare: light gray;
Material group: I;
Material izolator: Polybutylene terephthalate (PBT);
Flammability class per UL94: V0;
Clamping spring material: Chrome nickel spring steel (CrNi);
Contact material: Cupru electrolitic (ECu);
Contact plating: silver-plated;
Greutate: 31,9; g
Temperatura lucru: -60 ... +120 °C;
Tip ambalare: BOX;
Tara de origine: DE;
GTIN: 4055143735476;
Customs tariff number: 85366990990;
Pret: 49,69 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/tht-male-header-1-2-x-1-2-mm-solder-pin-straight-100-protected-against-mismating-silver-plated-contacts-pin-spacing-10-16-mm-6-pole-light-gray-132125>