


Furnizor: **Sc Trivolt Distribution SRL**  
Reg. com.: J23/3300/2016  
CIF: RO36421140  
Adresa: Strada Apusului nr 3 ( primul  
sens giratoriu Tehodor Pallady-  
Autostrada Soarelui), Catelu, Ilfov  
Banca: BRD  
IBAN: RO34BRDE441SV13182234410

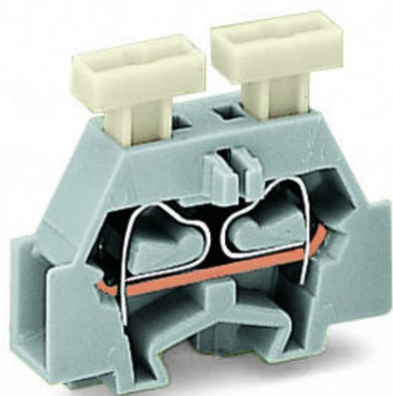

**WAGO 2-CONDUCTOR TERMINAL BLOCK; ON BOTH SIDES WITH  
PUSH-BUTTON; WITH SNAP-IN MOUNTING FOOT; FOR PLATE  
THICKNESS 0.6 - 1.2 MM; FIXING HOLE 3.5 MM  $\tilde{\text{A}}$ ; 2.5 MM $\tilde{\text{A}}$ <sup>2</sup>; CAGE  
CLAMP $\tilde{\text{A}}$ ; 2,50 MM $\tilde{\text{A}}$ <sup>2</sup>; ORANGE**

Tensiune nominala (III/3): 500; V  
Tensiune nominala de supratensiune (III/3): 6; kV  
Curent nominal: 24; A  
Legend (ratings): (III / 3)  $\tilde{\text{A}}$ %<sup>TM</sup> Overvoltage category III / Pollution degree 3;  
Tehnologie conexiune: CAGE CLAMP $\tilde{\text{A}}$ ;  
Tip actionare: Operating tool; Push-button;  
Connectable conductor materials: Copper;  
Solid conductor: 0.08 ... 2.5 mm $\tilde{\text{A}}$ <sup>2</sup> / 28 ... 14 AWG;  
Fine-stranded conductor: 0.08 ... 2.5 mm $\tilde{\text{A}}$ <sup>2</sup> / 28 ... 14 AWG;  
Strip length: 8 ... 9 mm / 0.31 ... 0.35 inch;  
Numar poli: 1;  
Numar total de conexiuni: 2;  
Total number of potentials: 1;  
Numar nivele: 1;  
Wiring type: Side-entry wiring;  
Latime: 6 mm / 0.236 inch;  
Inaltime de la fata: 23.2 mm / 0.913 inch;  
Adancime: 28 mm / 1.102 inch;  
Design: horizontal;  
Tip montaj: Snap-in mounting foot;  
Marking level: Side marking;  
Culoare: orange;  
Fire load: 0,052; MJ  
Greutate: 2,6; g  
Tip ambalare: BOX;  
Tara de origine: DE;  
GTIN: 4044918625760;  
Customs tariff number: 85369010000;  
Pret: 2,57 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/2-conductor-terminal-block-on-both-sides-with-push-button-with-snap-in-mounting-foot-for-plate-thickness-0-6-1-2-mm-fixing-hole-3-5-mm-oe-2-5-mm2-cage-clamp-2-50-mm2-orange-132465>