


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

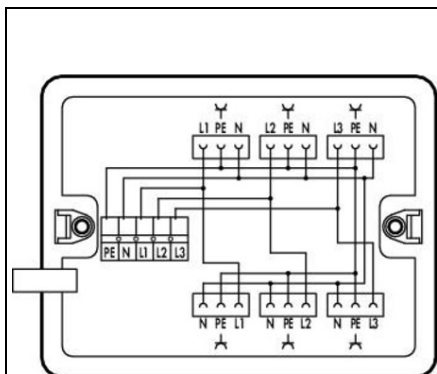

**WAGO DISTRIBUTION BOX; THREE-PHASE TO SINGLE-PHASE
CURRENT (400 V/230 V); SUPPLY CABLE ENTRY; 6 OUTPUTS; COD. A;
MIDI; WHITE**

Note on Contact Resistance: approx. 1 mΩ; of contact resistanceâ€© approx. 0.25 mΩ; contact transition plug/socket;

Ratings per: IEC/EN 60664-1;

Tensiune nominala (III/3): 400; V

Tensiune nominala de supratensiune (III/3): 6; kV

Curent nominal: 25; A

Tensiune nominala (III/3) 2: 250; V

Tensiune nominala de supratensiune (III/3) 2: 4; kV

Legend (ratings): (III / 3) â‰‰™ Overvoltage category III / Pollution degree 3;

Latime: 190 mm / 7.48 inch;

Inaltime: 30 mm / 1.181 inch;

Adancime: 145 mm / 5.709 inch;

Interne Verdrahtung: 4; mm²

Coding: A;

Tip montaj: Wall, screw mount; Installation on mounting plate;

Protection type: IP20;

Note on protection type: Only when mated (these compact connectors are not designed for use in open, easily accessible areas.);

Application: General mains applications;

Mismating protection: Yes;

Locking of plug-in connection: locking lever;

Culoare: white;

Material izolator: Polyamide 66 (PA 66);

Contact material: Copper or copper alloy (surface-treated);

Greutate: 440; g

Processing temperature: -5 ... +40 °C;

Continuous operating temperature: -35 ... +85 °C;

Note on continuous operating temperature: Insulating parts for temperatures ≤ 105 °C;

Tip ambalare: BOX;

Tara de origine: DE;

GTIN: 4055143308328;

Customs tariff number: 85366990990;

Pret: 301,86 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/distribution-box-three-phase-to-single-phase-current-400-v-230-v-supply-cable-entry-6-outputs-cod-a-midi-white-132764>