


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

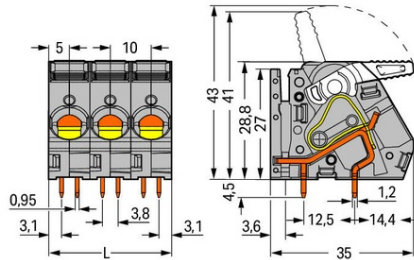

WAGO PCB TERMINAL BLOCK; LEVER; 16 MM²; PIN SPACING 10 MM; 6-POLE; CAGE CLAMP®; COMMONING OPTION; 16,00 MM²; GRAY

Ratings per: IEC/EN 60664-1;
Tensiune nominala (III/3): 320; V
Tensiune nominala de supratensiune (III/3): 4; kV
Tensiune nominala (III/2): 320; V
Tensiune nominala de supratensiune (III/2): 4; kV
Tensiune nominala (II/2): 630; V
Tensiune nominala de supratensiune (II/2): 4; kV
Curent nominal: 76; A
Legend (ratings): (III / 2) $\hat{=}$ Overvoltage category III / Pollution degree 2;
Tensiune nominala UL (Use Group B): 300; V
Curent nominal UL (Use Group B): 55; A
Tensiune nominala UL (Use Group C): 150; V
Curent nominal UL (Use Group C): 55; A
Tensiune nominala UL (Use Group D): 300; V
Curent nominal UL (Use Group D): 10; A
Certificari: UL 1059;
Tehnologie conexiune: CAGE CLAMP®;
Tip actionare: Lever;
Solid conductor: 1,5 ... 16 mm² / 16 ... 6 AWG;
Fine-stranded conductor: 1,5 ... 16 mm² / 16 ... 6 AWG;
Fine-stranded conductor; with insulated ferrule: 1,5 ... 10 mm²;
Fine-stranded conductor; with uninsulated ferrule: 1,5 ... 10 mm²;
Strip length: 12 ... 13 mm / 0.47 ... 0.51 inch;
Conductor connection direction to PCB: 30; °
Numar poli: 6;
Numar total de conexiuni: 6;
Total number of potentials: 6;
Numar tipuri de conexiuni: 1;
Numar nivele: 1;
Number of jumper slots: 1;
Distanta intre pini: 10 mm / 0.394 inch;
Latime: 61,5 mm / 2.421 inch;
Inaltime: 33,3 mm / 1.311 inch;
Inaltime de la fata: 28,8 mm / 1.134 inch;
Adancime: 35 mm / 1.378 inch;
Lungimea pinului de contact: 4,5; mm
Solder pin dimensions: 0,95 x 1,2 mm;
Diametrul de gaurire cu toleranta: 1,6 (+0,1) mm;
PCB contact: THT;
Solder pin arrangement: over the entire terminal strip (in-line);
Number of solder pins per potential: 4;
Culoare: gray;
Material group: I;
Material izolator: Polyamide 66 (PA 66);
Flammability class per UL94: V0;
Clamping spring material: Chrome nickel spring steel (CrNi);
Contact material: Cupru electrolitic (ECu);
Contact plating: tin-plated;
Fire load: 1,066; MJ
Greutate: 62,9; g
Temperatura lucru: -60 ... +105 °C;
Product Group: 4 (Printed Circuit);
Tip ambalare: BOX;
Tara de origine: PL;
GTIN: 4045454739386;
Customs tariff number: 85369010000;
Pret: 52,13 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/pcb-terminal-block-lever-16-mm2-pin-spacing-10-mm-6-pole-cage-clamp-commoning-option-16-00-mm2-gray-133171>