


Furnizor: **Sc Trivolt Distribution SRL**  
Reg. com.: J23/3300/2016  
CIF: RO36421140  
Adresa: Strada Apusului nr 3 ( primul  
sens giratoriu Tehodor Pallady-  
Autostrada Soarelui), Catelu, Ilfov  
Banca: BRD  
IBAN: RO34BRDE441SV13182234410

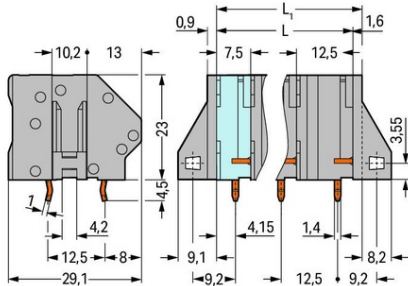

**WAGO PCB TERMINAL BLOCK; 6 MM<sup>2</sup>; PIN SPACING 12.5 MM; 4-  
POLE; CAGE CLAMP®; COMMONING OPTION; 6,00 MM<sup>2</sup>; GRAY**

Ratings per: IEC/EN 60664-1;  
Tensiune nominala (III/3): 1000; V  
Tensiune nominala de supratensiune (III/3): 8; kV  
Tensiune nominala (III/2): 1000; V  
Tensiune nominala de supratensiune (III/2): 8; kV  
Tensiune nominala (II/2): 1000; V  
Tensiune nominala de supratensiune (II/2): 8; kV  
Curent nominal: 41; A  
Legend (ratings): (III / 2) %™ Overvoltage category III / Pollution degree 2;  
Tensiune nominala UL (Use Group B): 600; V  
Curent nominal UL (Use Group B): 30; A  
Tensiune nominala UL (Use Group C): 600; V  
Curent nominal UL (Use Group C): 30; A  
Certificari: UL 1059;  
Tensiune nominala CSA (Use Group B): 600; V  
Curent nominal CSA (Use Group B): 30; A  
Tensiune nominala CSA (Use Group C): 600; V  
Curent nominal CSA (Use Group C): 30; A  
Tehnologie conexiune: CAGE CLAMP®;  
Tip actionare: Operating tool;  
Solid conductor: 0,2 ... 6 mm<sup>2</sup> / 24 ... 10 AWG;  
Fine-stranded conductor: 0,2 ... 6 mm<sup>2</sup> / 24 ... 10 AWG;  
Fine-stranded conductor; with insulated ferrule: 0,25 ... 4 mm<sup>2</sup>;  
Fine-stranded conductor; with uninsulated ferrule: 0,25 ... 4 mm<sup>2</sup>;  
Strip length: 11 ... 12 mm / 0.43 ... 0.47 inch;  
Conductor connection direction to PCB: 45; °  
Numar poli: 4;  
Numar total de conexiuni: 4;  
Total number of potentials: 4;  
Numar tipuri de conexiuni: 1;  
Numar nivele: 1;  
Distanta intre pini: 12,5 mm / 0.492 inch;  
Latime: 46,6 mm / 1.835 inch;  
Inaltime: 27,5 mm / 1.083 inch;  
Inaltime de la fata: 23 mm / 0.906 inch;  
Adancime: 29,1 mm / 1.146 inch;  
Lungimea pinului de contact: 4,5; mm  
Solder pin dimensions: 1 x 1,4 mm;  
Diametrul de gaurire cu toleranta: 1,8 (+0,1) mm;  
PCB contact: THT;  
Solder pin arrangement: over the entire terminal strip (in-line);  
Number of solder pins per potential: 2;  
Culoare: gray;  
Material group: I;  
Material izolator: Polyamide 66 (PA 66);  
Flammability class per UL94: V0;  
Clamping spring material: Chrome nickel spring steel (CrNi);  
Contact material: Cupru electrolitic (ECu);  
Contact plating: tin-plated;  
Fire load: 0,475; MJ  
Greutate: 25,1; g  
Temperatura lucru: -60 ... +105 °C;  
Product Group: 4 (Printed Circuit);  
Tip ambalare: BOX;  
Tara de origine: PL;  
GTIN: 4045454625467;  
Customs tariff number: 85369010000;  
Pret: 24,18 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/pcb-terminal-block-6-mm2-pin-spacing-12-5-mm-4-pole-cage-clamp-commoning-option-6-00-mm2-gray-133241>