


Furnizor: **Sc Trivolt Distribution SRL**  
Reg. com.: J23/3300/2016  
CIF: RO36421140  
Adresa: Strada Apusului nr 3 ( primul  
sens giratoriu Tehodor Pallady-  
Autostrada Soarelui), Catelu, Ilfov  
Banca: BRD  
IBAN: RO34BRDE441SV13182234410

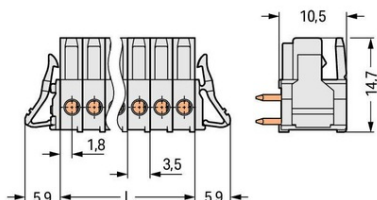

**WAGO THT FEMALE HEADER; 0.9 X 0.9 MM SOLDER PIN; ANGLED;  
100% PROTECTED AGAINST MISMATING; LOCKING LEVER; PIN  
SPACING 3.5 MM; 24-POLE; LIGHT GRAY**

Ratings per: IEC/EN 60664-1;  
Tensiune nominala (III/3): 160; V  
Tensiune nominala de supratensiune (III/3): 2,5; kV  
Tensiune nominala (III/2): 160; V  
Tensiune nominala de supratensiune (III/2): 2,5; kV  
Tensiune nominala (II/2): 320; V  
Tensiune nominala de supratensiune (II/2): 2,5; kV  
Curent nominal: 10; A  
Legend (ratings): (III / 2)  $\hat{a}$ %<sup>TM</sup> Overvoltage category III / Pollution degree 2;  
Tensiune nominala UL (Use Group B): 300; V  
Curent nominal UL (Use Group B): 10; A  
Tensiune nominala UL (Use Group D): 300; V  
Curent nominal UL (Use Group D): 10; A  
Certificari: UL 1059;  
Tensiune nominala CSA (Use Group B): 300; V  
Curent nominal CSA (Use Group B): 10; A  
Tensiune nominala CSA (Use Group D): 300; V  
Curent nominal CSA (Use Group D): 10; A  
Numar poli: 24;  
Numar total de conexiuni: 24;  
Total number of potentials: 24;  
Numar tipuri de conexiuni: 1;  
Numar nivele: 1;  
Distanta intre pini: 3.5 mm / 0.138 inch;  
Latime: 95.8 mm / 3.772 inch;  
Inaltime: 14.3 mm / 0.563 inch;  
Inaltime de la fata: 10.5 mm / 0.413 inch;  
Adancime: 14.65 mm / 0.577 inch;  
Lungimea pinului de contact: 3,8; mm  
Solder pin dimensions: 0.9 x 0.9 mm;  
Diametrul de gaurire cu toleranta: 1.4 (+0.1) mm;  
Tip contact (pluggable connector): Conector mama/priza;  
Connector (connection type): for PCBs;  
Mismating protection: Yes;  
Mating direction to the PCB: 0; °  
Locking of plug-in connection: locking lever;  
PCB contact: THT;  
Solder pin arrangement: over the entire female connector, in line;  
Number of solder pins per potential: 1;  
Culoare: light gray;  
Material group: I;  
Material izolator: Polyamide 66 (PA 66);  
Flammability class per UL94: V0;  
Contact material: Copper alloy;  
Contact plating: tin-plated;  
Fire load: 0,204; MJ  
Greutate: 13,1; g  
Temperatura lucru: -60 ... +100 °C;  
Product Group: 3 (Multi Conn. System);  
Tip ambalare: BOX;  
Tara de origine: DE;  
GTIN: 4045454121686;  
Customs tariff number: 85366990990;  
Pret: 67,19 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/tht-female-header-0-9-x-0-9-mm-solder-pin-angled-100-protected-against-mismating-locking-lever-pin-spacing-3-5-mm-24-pole-light-gray-133879>