


Furnizor: **Sc Trivolt Distribution SRL**  
Reg. com.: J23/3300/2016  
CIF: RO36421140  
Adresa: Strada Apusului nr 3 ( primul  
sens giratoriu Tehodor Pallady-  
Autostrada Soarelui), Catelu, Ilfov  
Banca: BRD  
IBAN: RO34BRDE441SV13182234410

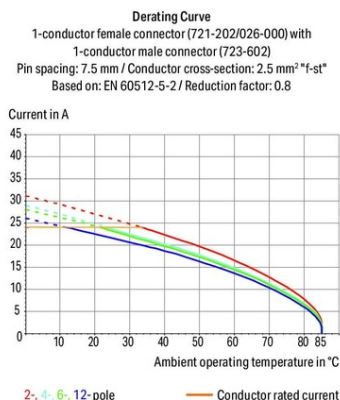

**WAGO 1-CONDUCTOR MALE CONNECTOR; 100% PROTECTED  
AGAINST MISMATING; PRECEDING GROUND CONTACT; SNAP-IN  
FLANGE; DIRECT MARKING; 2.5 MM<sup>2</sup>; PIN SPACING 7.5 MM; 4-  
POLE; 2,50 MM<sup>2</sup>; LIGHT GRAY**

Ratings per: IEC/EN 60664-1;  
Tensiune nominala (III/3): 500; V  
Tensiune nominala de supratensiune (III/3): 6; kV  
Tensiune nominala (III/2): 630; V  
Tensiune nominala de supratensiune (III/2): 6; kV  
Tensiune nominala (II/2): 1000; V  
Tensiune nominala de supratensiune (II/2): 6; kV  
Curent nominal: 12; A  
Legend (ratings): (III / 2)  $\hat{=}$  Overvoltage category III / Pollution degree 2;  
Tensiune nominala UL (Use Group B): 300; V  
Curent nominal UL (Use Group B): 15; A  
Tensiune nominala UL (Use Group D): 300; V  
Curent nominal UL (Use Group D): 10; A  
Certificari: UL 1059;  
Tensiune nominala UL 1977: 600; V  
Curent nominal UL 1977: 15; A  
Tensiune nominala CSA (Use Group B): 300; V  
Curent nominal CSA (Use Group B): 15; A  
Tensiune nominala CSA (Use Group D): 300; V  
Curent nominal CSA (Use Group D): 10; A  
Tehnologie conexiune: CAGE CLAMP®;  
Tip actionare: Operating tool;  
Solid conductor: 0.08 ... 2.5 mm<sup>2</sup> / 28 ... 12 AWG;  
Fine-stranded conductor: 0.08 ... 2.5 mm<sup>2</sup> / 28 ... 12 AWG;  
Fine-stranded conductor; with insulated ferrule: 0.25 ... 1.5 mm<sup>2</sup>;  
Fine-stranded conductor; with uninsulated ferrule: 0.25 ... 2.5 mm<sup>2</sup>;  
Strip length: 8 ... 9 mm / 0.31 ... 0.35 inch;  
Numar poli: 4;  
Numar total de conexiuni: 4;  
Total number of potentials: 4;  
Numar tipuri de conexiuni: 1;  
Numar nivele: 1;  
Ground function: with preceding GND contact;  
Conductor entry direction to mating direction: 0; °  
Distanța între pini: 7.5 mm / 0.295 inch;  
Latime: 48.5 mm / 1.91 inch;  
Inaltime: 17.5 mm / 0.689 inch;  
Adancime: 27.5 mm / 1.083 inch;  
Housing sheet thickness: 0.5 ... 2.5 mm / 0.02 ... 0.098 inch;  
Tip montaj: Snap-in;  
Tip montaj: Feed-through mounting;  
Tip contact (pluggable connector): Conector tata/fisa;  
Connector (connection type): for conductors;  
Mismating protection: Yes;  
Culoare: light gray;  
Material group: I;  
Material izolator: Polyamide 66 (PA 66);  
Flammability class per UL94: V0;  
Clamping spring material: Chrome nickel spring steel (CrNi);  
Contact material: Cupru electrolitic (ECu);  
Contact plating: tin-plated;  
Fire load: 0,206; MJ  
Greutate: 9,4; g  
Temperatura lucru: -60 ... +100 °C;  
Product Group: 3 (Multi Conn. System);  
Tip ambalare: BOX;  
Tara de origine: DE;  
GTIN: 4050821280576;  
Customs tariff number: 85366990990;  
Pret: 24,00 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/1-conductor-male-connector-100-protected-against-mismatching-preceding-ground-contact-snap-in-flange-direct-marking-2-5-mm2-pin-spacing-7-5-mm-4-pole-2-50-mm2-light-gray-134427>