


Furnizor: **Sc Trivolt Distribution SRL**  
 Reg. com.: J23/3300/2016  
 CIF: RO36421140  
 Adresa: Strada Apusului nr 3 ( primul  
 sens giratoriu Tehodor Pallady-  
 Autostrada Soarelui), Catelu, Ilfov  
 Banca: BRD  
 IBAN: RO34BRDE441SV13182234410

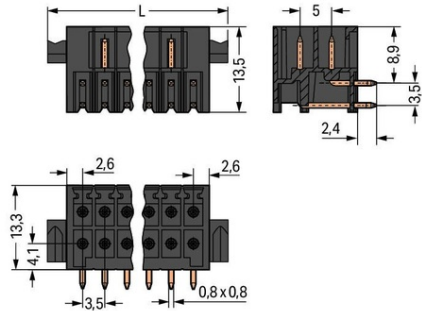

**WAGO THR MALE HEADER, 2-ROW; 0.8 X 0.8 MM SOLDER PIN;  
 ANGLED; 100% PROTECTED AGAINST MISMATING; LEVERS; IN  
 TAPE-AND-REEL PACKAGING; PIN SPACING 3.5 MM; 2 X 18-POLE;  
 BLACK**

Ratings per: IEC/EN 60664-1;  
 Tensiune nominala (III/3): 80; V  
 Tensiune nominala de supratensiune (III/3): 2,5; kV  
 Tensiune nominala (III/2): 160; V  
 Tensiune nominala de supratensiune (III/2): 2,5; kV  
 Tensiune nominala (II/2): 250; V  
 Tensiune nominala de supratensiune (II/2): 2,5; kV  
 Curent nominal: 10; A  
 Legend (ratings): (III / 2)  $\hat{=}$  Overvoltage category III / Pollution degree 2;  
 Tensiune nominala UL (Use Group B): 150; V  
 Curent nominal UL (Use Group B): 10; A  
 Tensiune nominala UL (Use Group C): 50; V  
 Curent nominal UL (Use Group C): 10; A  
 Certificari: UL 1059;  
 Tensiune nominala CSA (Use Group B): 150; V  
 Curent nominal CSA (Use Group B): 12; A  
 Numar poli: 36;  
 Total number of potentials: 3;  
 Numar tipuri de conexiuni: 1;  
 Numar nivele: 2;  
 Distanta intre pini: 3.5 mm / 0.138 inch;  
 Latime: 71.1 mm / 2.799 inch;  
 Inaltime: 15.7 mm / 0.618 inch;  
 Inaltime de la fata: 13.3 mm / 0.524 inch;  
 Adancime: 13.5 mm / 0.531 inch;  
 Lungimea pinului de contact: 2,4; mm  
 Solder pin dimensions: 0.8 x 0.8 mm;  
 Diametru placat prin gaura (THR): 1.3 (+0.1) mm;  
 Reel diameter of tape-and-reel packaging: 330; mm  
 Tape Latime: 88; mm  
 Tip contact (pluggable connector): Conector tata/fisa;  
 Connector (connection type): for PCBs;  
 Mismatching protection: Yes;  
 Mating direction to the PCB: 0; °  
 Locking of plug-in connection: Locking lever;  
 PCB contact: THR;  
 Solder pin arrangement: over the entire male connector, in line;  
 Number of solder pins per potential: 1;  
 Culoare: black;  
 Material group: I;  
 Material izolator: Polyphthalamide (PPA GF);  
 Flammability class per UL94: V0;  
 Contact material: Cupru electrolitic(ECu);  
 Contact plating: tin-plated;  
 Greutate: 10,5; g  
 Temperatura lucru: -60 ... +100 °C;  
 Tip ambalare: bag;  
 Tara de origine: DE;  
 GTIN: 4055143778664;  
 Customs tariff number: 85366990990;  
 Pret: 52,20 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/thr-male-header-2-row-0-8-x-0-8-mm-solder-pin-angled-100-protected-against-mismatching-levers-in-tape-and-reel-packaging-pin-spacing-3-5-mm-2-x-18-pole-black-134805>