


Furnizor: **Sc Trivolt Distribution SRL**  
Reg. com.: J23/3300/2016  
CIF: RO36421140  
Adresa: Strada Apusului nr 3 ( primul  
sens giratoriu Tehodor Pallady-  
Autostrada Soarelui), Catelu, Ilfov  
Banca: BRD  
IBAN: RO34BRDE441SV13182234410

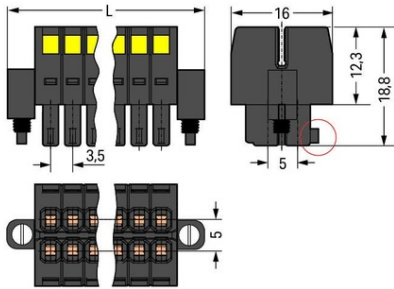

**WAGO 1-CONDUCTOR FEMALE CONNECTOR, 2-ROW; 100%  
PROTECTED AGAINST MISMATING; SCREW FLANGE; STRAIN RELIEF  
PLATE; DIRECT MARKING; 1.5 MM<sup>2</sup>; PIN SPACING 3.5 MM; 34-  
POLE; 1.50 MM<sup>2</sup>; BLACK**

Ratings per: IEC/EN 60664-1;  
Tensiune nominala (III/3): 80; V  
Tensiune nominala de supratensiune (III/3): 2,5; kV  
Tensiune nominala (III/2): 160; V  
Tensiune nominala de supratensiune (III/2): 2,5; kV  
Tensiune nominala (II/2): 250; V  
Tensiune nominala de supratensiune (II/2): 2,5; kV  
Curent nominal: 10; A  
Legend (ratings): (III / 2)  $\hat{\%}$ ™ Overvoltage category III / Pollution degree 2;  
Tensiune nominala UL (Use Group B): 300; V  
Curent nominal UL (Use Group B): 10; A  
Tensiune nominala UL (Use Group C): 50; V  
Curent nominal UL (Use Group C): 10; A  
Certificari: UL 1059;  
Tensiune nominala CSA (Use Group B): 300; V  
Curent nominal CSA (Use Group B): 10; A  
Tehnologie conexiune: CAGE CLAMP®;  
Tip actionare: Operating tool;  
Solid conductor: 0,08 ... 1,5 mm<sup>2</sup> / 28 ... 16 AWG;  
Fine-stranded conductor: 0,08 ... 1,5 mm<sup>2</sup> / 28 ... 16 AWG;  
Fine-stranded conductor; with insulated ferrule: 0,25 ... 1 mm<sup>2</sup>;  
Fine-stranded conductor; with uninsulated ferrule: 0,25 ... 1 mm<sup>2</sup>;  
Strip length: 6 ... 7 mm / 0.24 ... 0.28 inch;  
Numar poli: 34;  
Numar total de conexiuni: 34;  
Total number of potentials: 34;  
Numar tipuri de conexiuni: 1;  
Numar nivele: 2;  
Conductor entry direction to mating direction: 0; °  
Distanta intre pini: 3,5 mm / 0.138 inch;  
Latime: 69,6 mm / 2.74 inch;  
Inaltime: 54,2 mm / 2.134 inch;  
Adancime: 16 mm / 0.63 inch;  
Tip contact (pluggable connector): Conector mama/priza;  
Connector (connection type): for conductor;  
Mismatching protection: Yes;  
Locking of plug-in connection: Screw flange;  
Strain relief: strain relief plate;  
Culoare: black;  
Material group: II;  
Material izolator: Glass fiber-reinforced polyamide (PA°66°GF);  
Flammability class per UL94: V0;  
Clamping spring material: Chrome nickel spring steel (CrNi);  
Contact material: Copper alloy;  
Contact plating: tin-plated;  
Fire load: 0,343; MJ  
Greutate: 20,7; g  
Temperatura lucru: -60 ... +100 °C;  
Product Group: 3 (Multi Conn. System);  
Tip ambalare: BOX;  
Tara de origine: PL;  
GTIN: 4050821178255;  
Customs tariff number: 85366990990;  
Pret: 139,33 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/1-conductor-female-connector-2-row-100-protected-against-mismatching-screw-flange-strain-relief-plate-direct-marking-1-5-mm2-pin-spacing-3-5-mm-34-pole-1-50-mm2-black-135062>