


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

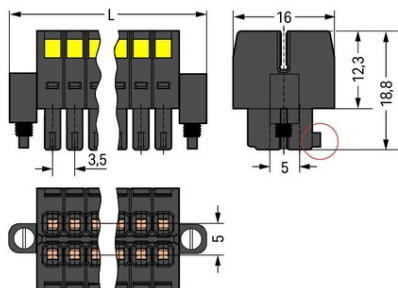

**WAGO 1-CONDUCTOR FEMALE CONNECTOR, 2-ROW; 100%
PROTECTED AGAINST MISMATCHING; SCREW FLANGE; STRAIN RELIEF
PLATE; DIRECT MARKING; 1.5 MM²; PIN SPACING 3.5 MM; 28-
POLE; 1.50 MM²; BLACK**

Ratings per: IEC/EN 60664-1;
Tensiune nominala (III/3): 80; V
Tensiune nominala de supratensiune (III/3): 2,5; kV
Tensiune nominala (III/2): 160; V
Tensiune nominala de supratensiune (III/2): 2,5; kV
Tensiune nominala (II/2): 250; V
Tensiune nominala de supratensiune (II/2): 2,5; kV
Curent nominal: 10; A
Legend (ratings): (III / 2) $\hat{\%}$ ™ Overvoltage category III / Pollution degree 2;
Tensiune nominala UL (Use Group B): 300; V
Curent nominal UL (Use Group B): 10; A
Tensiune nominala UL (Use Group C): 50; V
Curent nominal UL (Use Group C): 10; A
Certificari: UL 1059;
Tensiune nominala CSA (Use Group B): 300; V
Curent nominal CSA (Use Group B): 10; A
Tehnologie conexiune: CAGE CLAMP®;
Tip actionare: Operating tool;
Solid conductor: 0.08 ... 1.5 mm² / 28 ... 16 AWG;
Fine-stranded conductor: 0.08 ... 1.5 mm² / 28 ... 16 AWG;
Fine-stranded conductor; with insulated ferrule: 0.25 ... 1 mm²;
Fine-stranded conductor; with uninsulated ferrule: 0.25 ... 1 mm²;
Strip length: 6 ... 7 mm / 0.24 ... 0.28 inch;
Numar poli: 28;
Numar total de conexiuni: 28;
Total number of potentials: 28;
Numar tipuri de conexiuni: 1;
Numar nivele: 2;
Conductor entry direction to mating direction: 0; °
Distanta intre pini: 3.5 mm / 0.138 inch;
Latime: 59.1 mm / 2.327 inch;
Inaltime: 48.7 mm / 1.917 inch;
Adancime: 16 mm / 0.63 inch;
Tip contact (pluggable connector): Conector mama/priza;
Connector (connection type): for conductors;
Mismatching protection: Yes;
Locking of plug-in connection: Screw flange;
Strain relief: strain relief plate;
Culoare: black;
Material group: II;
Material izolator: Glass fiber-reinforced polyamide (PA 66 GF);
Flammability class per UL94: V0;
Clamping spring material: Chrome nickel spring steel (CrNi);
Contact material: Copper alloy;
Contact plating: tin-plated;
Fire load: 0,255; MJ
Greutate: 16,2; g
Temperatura lucru: -60 ... +100 °C;
Product Group: 3 (Multi Conn. System);
Tip ambalare: BOX;
Tara de origine: PL;
GTIN: 4050821178071;
Customs tariff number: 85366990990;
Pret: 114,31 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/1-conductor-female-connector-2-row-100-protected-against-mismatching-screw-flange-strain-relief-plate-direct-marking-1-5-mm2-pin-spacing-3-5-mm-28-pole-1-50-mm2-black-135116>