


Furnizor: **Sc Trivolt Distribution SRL**  
 Reg. com.: J23/3300/2016  
 CIF: RO36421140  
 Adresa: Strada Apusului nr 3 ( primul  
 sens giratoriu Tehodor Pallady-  
 Autostrada Soarelui), Catelu, Ilfov  
 Banca: BRD  
 IBAN: RO34BRDE441SV13182234410

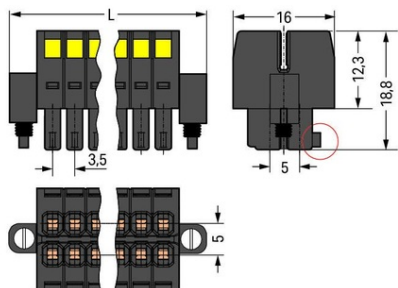

**WAGO 1-CONDUCTOR FEMALE CONNECTOR, 2-ROW; 100%  
 PROTECTED AGAINST MISMATING; SCREW FLANGE; DIRECT  
 MARKING; 1.5 MM<sup>2</sup>; PIN SPACING 3.5 MM; 22-POLE; 1,50 MM<sup>2</sup>;  
 BLACK**

Ratings per: IEC/EN 60664-1;  
 Tensiune nominala (III/3): 80; V  
 Tensiune nominala de supratensiune (III/3): 2,5; kV  
 Tensiune nominala (III/2): 160; V  
 Tensiune nominala de supratensiune (III/2): 2,5; kV  
 Tensiune nominala (II/2): 250; V  
 Tensiune nominala de supratensiune (II/2): 2,5; kV  
 Curent nominal: 10; A  
 Legend (ratings): (III / 2)  $\hat{\%}$ ™ Overvoltage category III / Pollution degree 2;  
 Tensiune nominala UL (Use Group B): 300; V  
 Curent nominal UL (Use Group B): 10; A  
 Tensiune nominala UL (Use Group C): 50; V  
 Curent nominal UL (Use Group C): 10; A  
 Certificari: UL 1059;  
 Tensiune nominala CSA (Use Group B): 300; V  
 Curent nominal CSA (Use Group B): 10; A  
 Tehnologie conexiune: CAGE CLAMP®;  
 Tip actionare: Operating tool;  
 Solid conductor: 0,08 ... 1,5 mm<sup>2</sup> / 28 ... 16 AWG;  
 Fine-stranded conductor: 0,08 ... 1,5 mm<sup>2</sup> / 28 ... 16 AWG;  
 Fine-stranded conductor; with insulated ferrule: 0,25 ... 1 mm<sup>2</sup>;  
 Fine-stranded conductor; with uninsulated ferrule: 0,25 ... 1 mm<sup>2</sup>;  
 Strip length: 6 ... 7 mm / 0.24 ... 0.28 inch;  
 Numar poli: 22;  
 Numar total de conexiuni: 22;  
 Total number of potentials: 22;  
 Numar tipuri de conexiuni: 1;  
 Numar nivele: 2;  
 Conductor entry direction to mating direction: 0; °  
 Distanta intre pini: 3,5 mm / 0.138 inch;  
 Latime: 48,6 mm / 1.913 inch;  
 Inaltime: 18,8 mm / 0.74 inch;  
 Adancime: 16 mm / 0.63 inch;  
 Tip contact (pluggable connector): Conector mama/priza;  
 Connector (connection type): for conductor;  
 Mismatching protection: Yes;  
 Locking of plug-in connection: Screw flange;  
 Culoare: black;  
 Material group: II;  
 Material izolator: Glass fiber-reinforced polyamide (PA<sup>66</sup>GF);  
 Flammability class per UL94: V0;  
 Clamping spring material: Chrome nickel spring steel (CrNi);  
 Contact material: Copper alloy;  
 Contact plating: tin-plated;  
 Fire load: 0,17; MJ  
 Greutate: 11,9; g  
 Temperatura lucru: -60 ... +100 °C;  
 Product Group: 3 (Multi Conn. System);  
 Tip ambalare: BOX;  
 Tara de origine: PL;  
 GTIN: 4050821177883;  
 Customs tariff number: 85366990990;  
 Pret: 87,83 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/1-conductor-female-connector-2-row-100-protected-against-mismatching-screw-flange-direct-marking-1-5-mm2-pin-spacing-3-5-mm-22-pole-1-50-mm2-black-135161>