


Furnizor: **Sc Trivolt Distribution SRL**  
 Reg. com.: J23/3300/2016  
 CIF: RO36421140  
 Adresa: Strada Apusului nr 3 ( primul  
 sens giratoriu Tehodor Pallady-  
 Autostrada Soarelui), Catelu, Ilfov  
 Banca: BRD  
 IBAN: RO34BRDE441SV13182234410

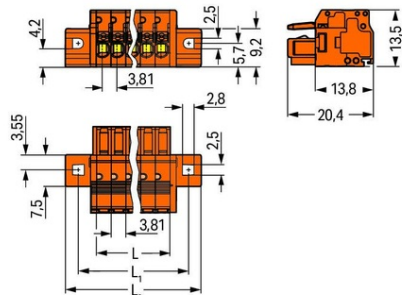

**WAGO 1-CONDUCTOR FEMALE PLUG; 100% PROTECTED AGAINST  
 MISMATING; PUSH-BUTTON; CLAMPING COLLAR; 1.5 MM<sup>2</sup>; PIN  
 SPACING 3.81 MM; 16-POLE; 1.50 MM<sup>2</sup>; ORANGE**

Ratings per: IEC/EN 60664-1;  
 Tensiune nominala (III/3): 160; V  
 Tensiune nominala de supratensiune (III/3): 2,5; kV  
 Tensiune nominala (III/2): 160; V  
 Tensiune nominala de supratensiune (III/2): 2,5; kV  
 Tensiune nominala (II/2): 320; V  
 Tensiune nominala de supratensiune (II/2): 2,5; kV  
 Curent nominal: 10; A  
 Legend (ratings): (III / 2)  $\hat{a}$ %<sup>TM</sup> Overvoltage category III / Pollution degree 2;  
 Tensiune nominala UL (Use Group B): 300; V  
 Curent nominal UL (Use Group B): 10; A  
 Tensiune nominala UL (Use Group D): 300; V  
 Curent nominal UL (Use Group D): 10; A  
 Certificari: UL 1059;  
 Tensiune nominala CSA (Use Group B): 300; V  
 Curent nominal CSA (Use Group B): 10; A  
 Tensiune nominala CSA (Use Group D): 300; V  
 Curent nominal CSA (Use Group D): 10; A  
 Tehnologie conexiune: Push-in CAGE CLAMP®;  
 Tip actionare: Push-button;  
 Solid conductor: 0.2 ... 1.5 mm<sup>2</sup> / 24 ... 16 AWG;  
 Fine-stranded conductor: 0.2 ... 1.5 mm<sup>2</sup> / 24 ... 16 AWG;  
 Fine-stranded conductor; with insulated ferrule: 0.25 ... 0.75 mm<sup>2</sup>;  
 Fine-stranded conductor; with uninsulated ferrule: 0.25 ... 1.5 mm<sup>2</sup>;  
 Strip length: 8 ... 9 mm / 0.31 ... 0.35 inch;  
 Numar poli: 16;  
 Numar total de conexiuni: 16;  
 Total number of potentials: 16;  
 Numar tipuri de conexiuni: 1;  
 Numar nivele: 1;  
 Conductor entry direction to mating direction: 0; °  
 Distanta intre pini: 3.81 mm / 0.15 inch;  
 Latime: 75.76 mm / 2.983 inch;  
 Inaltime: 13.5 mm / 0.531 inch;  
 Adancime: 20.4 mm / 0.803 inch;  
 Tip montaj: Mounting flange;  
 Tip montaj: Feed-through mounting; Panel mounting;  
 Tip contact (pluggable connector): Conector mama/priza;  
 Connector (connection type): for conductors;  
 Mismatching protection: Yes;  
 Culoare: orange;  
 Material group: I;  
 Material izolator: Polyamide 66 (PA 66);  
 Flammability class per UL94: V0;  
 Clamping spring material: Chrome nickel spring steel (CrNi);  
 Contact material: Copper alloy;  
 Contact plating: tin-plated;  
 Fire load: 0,32; MJ  
 Greutate: 15,9; g  
 Temperatura lucru: -60 ... +100 °C;  
 Product Group: 3 (Multi Conn. System);  
 Tip ambalare: BOX;  
 Tara de origine: PL;  
 GTIN: 4055143296816;  
 Customs tariff number: 85366990990;  
 Pret: 67,52 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/1-conductor-female-plug-100-protected-against-mismatching-push-button-clamping-collar-1-5-mm2-pin-spacing-3-81-mm-16-pole-1-50-mm2-orange-135384>