


Furnizor: **Sc Trivolt Distribution SRL**  
Reg. com.: J23/3300/2016  
CIF: RO36421140  
Adresa: Strada Apusului nr 3 ( primul  
sens giratoriu Tehodor Pallady-  
Autostrada Soarelui), Catelu, Ilfov  
Banca: BRD  
IBAN: RO34BRDE441SV13182234410

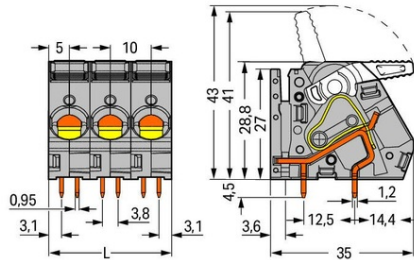

**WAGO PCB TERMINAL BLOCK; LEVER; 16 MM<sup>2</sup>; PIN SPACING 10 MM; 7-POLE; CAGE CLAMP®; COMMONING OPTION; 16,00 MM<sup>2</sup>; GRAY**

Ratings per: IEC/EN 60664-1;  
Tensiune nominala (III/3): 320; V  
Tensiune nominala de supratensiune (III/3): 4; kV  
Tensiune nominala (III/2): 320; V  
Tensiune nominala de supratensiune (III/2): 4; kV  
Tensiune nominala (II/2): 630; V  
Tensiune nominala de supratensiune (II/2): 4; kV  
Curent nominal: 76; A  
Legend (ratings): (III / 2)  $\hat{a}$ %<sup>o</sup>™ Overvoltage category III / Pollution degree 2;  
Tensiune nominala UL (Use Group B): 300; V  
Curent nominal UL (Use Group B): 55; A  
Tensiune nominala UL (Use Group C): 150; V  
Curent nominal UL (Use Group C): 55; A  
Tensiune nominala UL (Use Group D): 300; V  
Curent nominal UL (Use Group D): 10; A  
Certificari: UL 1059;  
Tehnologie conexiune: CAGE CLAMP®;  
Tip actionare: Lever;  
Solid conductor: 1,5 ... 16 mm<sup>2</sup> / 16 ... 6 AWG;  
Fine-stranded conductor: 1,5 ... 16 mm<sup>2</sup> / 16 ... 6 AWG;  
Fine-stranded conductor; with insulated ferrule: 1,5 ... 10 mm<sup>2</sup>;  
Fine-stranded conductor; with uninsulated ferrule: 1,5 ... 10 mm<sup>2</sup>;  
Strip length: 12 ... 13 mm / 0.47 ... 0.51 inch;  
Conductor connection direction to PCB: 30; °  
Numar poli: 7;  
Numar total de conexiuni: 7;  
Total number of potentials: 7;  
Numar tipuri de conexiuni: 1;  
Numar nivele: 1;  
Number of jumper slots: 1;  
Distanta intre pini: 10 mm / 0.394 inch;  
Latime: 71,5 mm / 2.815 inch;  
Inaltime: 33,3 mm / 1.311 inch;  
Inaltime de la fata: 28,8 mm / 1.134 inch;  
Adancime: 35 mm / 1.378 inch;  
Lungimea pinului de contact: 4,5; mm  
Solder pin dimensions: 0,95 x 1,2 mm;  
Diametrul de gaurire cu toleranta: 1,6 (+0,1) mm;  
PCB contact: THT;  
Solder pin arrangement: over the entire terminal strip (in-line);  
Number of solder pins per potential: 4;  
Culoare: gray;  
Material group: I;  
Material izolator: Polyamide 66 (PA 66);  
Flammability class per UL94: V0;  
Clamping spring material: Chrome nickel spring steel (CrNi);  
Contact material: Cupru electrolitic (ECu);  
Contact plating: tin-plated;  
Fire load: 1,244; MJ  
Greutate: 73,4; g  
Temperatura lucru: -60 ... +105 °C;  
Product Group: 4 (Printed Circuit);  
Tip ambalare: BOX;  
Tara de origine: PL;  
GTIN: 4045454739393;  
Customs tariff number: 85369010000;  
Pret: 60,77 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/pcb-terminal-block-lever-16-mm2-pin-spacing-10-mm-7-pole-cage-clamp-commoning-option-16-00-mm2-gray-135630>