


Furnizor: **Sc Trivolt Distribution SRL**
 Reg. com.: J23/3300/2016
 CIF: RO36421140
 Adresa: Strada Apusului nr 3 (primul
 sens giratoriu Tehodor Pallady-
 Autostrada Soarelui), Catelu, Ilfov
 Banca: BRD
 IBAN: RO34BRDE441SV13182234410

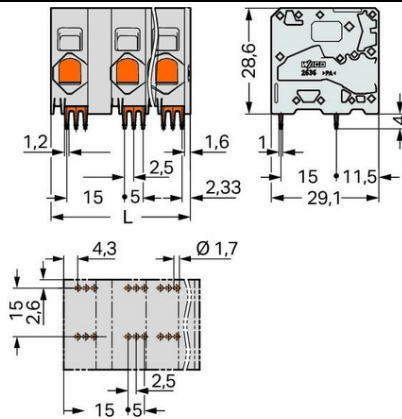

**WAGO PCB TERMINAL BLOCK; 16 MM²; PIN SPACING 15 MM; 4-
 POLE; PUSH-IN CAGE CLAMP®; 16,00 MM²; GRAY**

Ratings per: IEC/EN 60664-1;
 Tensiune nominala (III/3): 1000; V
 Tensiune nominala de supratensiune (III/3): 8; kV
 Tensiune nominala (III/2): 1000; V
 Tensiune nominala de supratensiune (III/2): 8; kV
 Tensiune nominala (II/2): 1000; V
 Tensiune nominala de supratensiune (II/2): 8; kV
 Curent nominal: 76; A
 Legend (ratings): (III / 2) \hat{a} %™ Overvoltage category III / Pollution degree 2;
 Tensiune nominala UL (Use Group B): 300; V
 Curent nominal UL (Use Group B): 85; A
 Tensiune nominala UL (Use Group C): 300; V
 Curent nominal UL (Use Group C): 85; A
 Certificari: UL 1059;
 Tehnologie conexiune: Push-in CAGE CLAMP®;
 Tip actionare: Operating tool;
 Solid conductor: 0,75 ... 16 mm² / 18 ... 4 AWG;
 Fine-stranded conductor: 0,75 ... 25 mm² / 18 ... 4 AWG;
 Fine-stranded conductor; with insulated ferrule: 0,75 ... 16 mm²;
 Fine-stranded conductor; with uninsulated ferrule: 0,75 ... 16 mm²;
 Fine-stranded conductor; with twin ferrule: 0,75 ... 6 mm²;
 Strip length: 18 ... 20 mm / 0.71 ... 0.79 inch;
 Conductor connection direction to PCB: 0; °
 Numar poli: 4;
 Numar total de conexiuni: 4;
 Total number of potentials: 4;
 Numar tipuri de conexiuni: 1;
 Numar nivele: 1;
 Distanta intre pini: 15 mm / 0.591 inch;
 Latime: 56,6 mm / 2.228 inch;
 Inaltime: 32,6 mm / 1.283 inch;
 Inaltime de la fata: 28,6 mm / 1.126 inch;
 Adancime: 29,1 mm / 1.146 inch;
 Lungimea pinului de contact: 4; mm
 Solder pin dimensions: 1,2 x 1 mm;
 Diametrul de gaurire cu toleranta: 1,7 (+0,1) mm;
 Tip montaj: Feed-through mounting;
 PCB contact: THT;
 Solder pin arrangement: over the entire terminal strip (in-line);
 Number of solder pins per potential: 6;
 Culoare: gray;
 Material group: I;
 Material izolator: Polyamide 66 (PA 66);
 Flammability class per UL94: V0;
 Clamping spring material: Chrome nickel spring steel (CrNi);
 Contact material: Cupru electrolitic (ECu);
 Contact plating: tin-plated;
 Greutate: 39,1; g
 Temperatura lucru: -60 ... +105 °C;
 Tip ambalare: BOX;
 Tara de origine: DE;
 GTIN: 4055143861380;
 Customs tariff number: 85369010000;
 Pret: 62,10 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/pcb-terminal-block-16-mm2-pin-spacing-15-mm-4-pole-push-in-cage-clamp-16-00-mm2-gray-135815>