


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

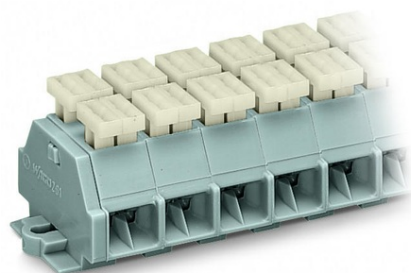

**WAGO 4-CONDUCTOR TERMINAL STRIP; 4-POLE; ON BOTH SIDES
WITH PUSH-BUTTONS; WITH SNAP-IN MOUNTING FEET; FOR PLATE
THICKNESS 0.6 - 1.2 MM; FIXING HOLE 3.5 MM $\tilde{\sim}$; 2.5 MM $\hat{\wedge}$ 2; CAGE
CLAMP $\hat{\wedge}$ @; 2,50 MM $\hat{\wedge}$ 2; GRAY**

Tensiune nominala (III/3): 500; V
Tensiune nominala de supratensiune (III/3): 6; kV
Curent nominal: 24; A
Legend (ratings): (III / 3) $\hat{\wedge}$ % $\hat{\wedge}$ ™ Overvoltage category III / Pollution degree 3;
Tehnologie conexiune: CAGE CLAMP $\hat{\wedge}$ @;
Tip actionare: Operating tool; Push-button;
Connectable conductor materials: Copper;
Solid conductor: 0.08 ... 2.5 mm $\hat{\wedge}$ 2 / 28 ... 14 AWG;
Fine-stranded conductor: 0.08 ... 2.5 mm $\hat{\wedge}$ 2 / 28 ... 14 AWG;
Strip length: 8 ... 9 mm / 0.31 ... 0.35 inch;
Numar poli: 4;
Numar total de conexiuni: 16;
Total number of potentials: 4;
Numar nivele: 1;
Wiring type: Side-entry wiring;
Latime: 44.4 mm / 1.748 inch;
Inaltime de la fata: 23.2 mm / 0.913 inch;
Adancime: 28 mm / 1.102 inch;
Module Latime: 10 mm / 0.394 inch;
Design: horizontal;
Tip montaj: Snap-in mounting foot;
Marking level: Side marking;
Culoare: gray;
Fire load: 0,338; MJ
Greutate: 18,5; g
Product Group: 9 (Std. Chassis Mt. Blocks);
Tip ambalare: BOX;
Tara de origine: DE;
GTIN: 4044918604659;
Customs tariff number: 85369010000;
Pret: 20,22 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/4-conductor-terminal-strip-4-pole-on-both-sides-with-push-buttons-with-snap-in-mounting-feet-for-plate-thickness-0-6-1-2-mm-fixing-hole-3-5-mm-oe-2-5-mm2-cage-clamp-2-50-mm2-gray-136110>