


Furnizor: **Sc Trivolt Distribution SRL**  
Reg. com.: J23/3300/2016  
CIF: RO36421140  
Adresa: Strada Apusului nr 3 ( primul  
sens giratoriu Tehodor Pallady-  
Autostrada Soarelui), Catelu, Ilfov  
Banca: BRD  
IBAN: RO34BRDE441SV13182234410

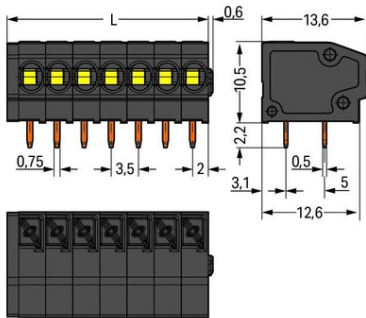

**WAGO THR PCB TERMINAL BLOCK; PUSH-BUTTON; 1.5 MM<sup>2</sup>; PIN  
SPACING 3.5 MM; 3-POLE; PUSH-IN CAGE CLAMP®; IN TAPE-AND-  
REEL PACKAGING; 1.50 MM<sup>2</sup>; BLACK**

Ratings per: IEC/EN 60664-1;  
Tensiune nominala (III/3): 200; V  
Tensiune nominala de supratensiune (III/3): 4; kV  
Tensiune nominala (III/2): 320; V  
Tensiune nominala de supratensiune (III/2): 4; kV  
Tensiune nominala (II/2): 320; V  
Tensiune nominala de supratensiune (II/2): 4; kV  
Curent nominal: 17,5; A  
Legend (ratings): (III / 2)  $\hat{a}$ %<sup>TM</sup> Overvoltage category III / Pollution degree 2;  
Tensiune nominala UL (Use Group B): 300; V  
Curent nominal UL (Use Group B): 10; A  
Tensiune nominala UL (Use Group C): 150; V  
Curent nominal UL (Use Group C): 10; A  
Tensiune nominala UL (Use Group D): 300; V  
Curent nominal UL (Use Group D): 10; A  
Certificari: UL 1059;  
Tehnologie conexiune: Push-in CAGE CLAMP®;  
Tip actionare: Push-button;  
Solid conductor: 0,2 ... 1,5 mm<sup>2</sup> / 24 ... 16 AWG;  
Fine-stranded conductor: 0,2 ... 1,5 mm<sup>2</sup> / 24 ... 16 AWG;  
Fine-stranded conductor; with insulated ferrule: 0,25 ... 1 mm<sup>2</sup>;  
Fine-stranded conductor; with uninsulated ferrule: 0,25 ... 1 mm<sup>2</sup>;  
Strip length: 9 ... 10 mm / 0.35 ... 0.39 inch;  
Conductor connection direction to PCB: 0; °  
Numar poli: 3;  
Total number of potentials: 3;  
Numar tipuri de conexiuni: 1;  
Numar nivele: 1;  
Distanta intre pini: 3,5 mm / 0.138 inch;  
Inaltime: 12,7 mm / 0.5 inch;  
Inaltime de la fata: 10,5 mm / 0.413 inch;  
Adancime: 13,6 mm / 0.535 inch;  
Lungimea pinului de contact: 2,2; mm  
Solder pin dimensions: 0,5 x 0,75 mm;  
Diametru placat prin gaura (THR): 1,1 (+0,1) mm;  
Reel diameter of tape-and-reel packaging: 330; mm  
Tape Latime: 32; mm  
PCB contact: THR;  
Solder pin arrangement: over the entire terminal strip (staggered);  
Number of solder pins per potential: 2;  
Culoare: black;  
Material group: III a;  
Material izolator: Polyamide 46 (PA 46);  
Flammability class per UL94: V2;  
Clamping spring material: Chrome nickel spring steel (CrNi);  
Contact material: Cupru electrolitic (ECu);  
Contact plating: tin-plated;  
Greutate: 2; g  
Temperatura lucru: -60 ... +105 °C;  
Tip ambalare: BOX;  
Tara de origine: DE;  
GTIN: 4055143235389;  
Customs tariff number: 85369010000;  
Pret: 6,57 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/thr-pcb-terminal-block-push-button-1-5-mm2-pin-spacing-3-5-mm-3-pole-push-in-cage-clamp-in-tape-and-reel-packaging-1-50-mm2-black-136423>