


Furnizor: **Sc Trivolt Distribution SRL**  
 Reg. com.: J23/3300/2016  
 CIF: RO36421140  
 Adresa: Strada Apusului nr 3 ( primul  
 sens giratoriu Tehodor Pallady-  
 Autostrada Soarelui), Catelu, Ilfov  
 Banca: BRD  
 IBAN: RO34BRDE441SV13182234410

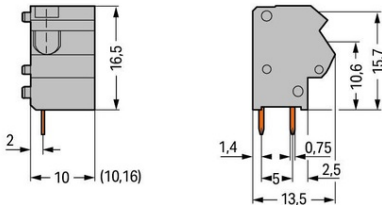

**WAGO STACKABLE 2-CONDUCTOR PCB TERMINAL BLOCK; 0.75  
 MM<sup>2</sup>; PIN SPACING 10/10.16 MM; 1-POLE; PUSH WIRE<sup>®</sup>; 0.75  
 MM<sup>2</sup>; LIGHT GREEN**

Ratings per: IEC/EN 60664-1;  
 Tensiune nominala (III/3): 630; V  
 Tensiune nominala de supratensiune (III/3): 8; kV  
 Tensiune nominala (III/2): 1000; V  
 Tensiune nominala de supratensiune (III/2): 8; kV  
 Tensiune nominala (II/2): 1000; V  
 Tensiune nominala de supratensiune (II/2): 8; kV  
 Curent nominal: 10; A  
 Legend (ratings): (III / 2)  $\hat{a}$ %<sup>TM</sup> Overvoltage category III / Pollution degree 2;  
 Tensiune nominala UL (Use Group B): 300; V  
 Curent nominal UL (Use Group B): 10; A  
 Tensiune nominala UL (Use Group D): 300; V  
 Curent nominal UL (Use Group D): 10; A  
 Certificari: UL 1059;  
 Tensiune nominala CSA (Use Group B): 300; V  
 Curent nominal CSA (Use Group B): 10; A  
 Tensiune nominala CSA (Use Group D): 300; V  
 Curent nominal CSA (Use Group D): 10; A  
 Tehnologie conexiune: PUSH WIRE<sup>®</sup>;  
 Tip actionare: Operating tool;  
 Solid conductor: 0.25 ... 0.75 mm<sup>2</sup> / 22 ... 18 AWG;  
 Strip length: 10 ... 12 mm / 0.39 ... 0.47 inch;  
 Conductor connection direction to PCB: 45; °  
 Numar poli: 1;  
 Numar total de conexiuni: 2;  
 Total number of potentials: 1;  
 Numar tipuri de conexiuni: 1;  
 Numar nivele: 1;  
 Distanta intre pini: 10/10.16 mm / 0.394/0.4 inch;  
 Latime: 11.7 mm / 0.461 inch;  
 Inaltime: 20.5 mm / 0.807 inch;  
 Inaltime de la fata: 16.5 mm / 0.65 inch;  
 Adancime: 13.5 mm / 0.531 inch;  
 Lungimea pinului de contact: 4; mm  
 Solder pin dimensions: 0.5 x 0.75 mm;  
 Diametrul de gaurire cu toleranta: 1.1 (+0.1) mm;  
 PCB contact: THT;  
 Solder pin arrangement: within the terminal block, in line;  
 Number of solder pins per potential: 2;  
 Culoare: light green;  
 Material group: I;  
 Material izolator: Polyamide 66 (PA 66);  
 Flammability class per UL94: V0;  
 Clamping spring material: Chrome nickel spring steel (CrNi);  
 Contact material: Cupru electrolitic(ESu);  
 Contact plating: tin-plated;  
 Fire load: 0,034; MJ  
 Greutate: 1,6; g  
 Temperatura lucru: -60 ... +105 °C;  
 Product Group: 4 (Printed Circuit);  
 Tip ambalare: BOX;  
 Tara de origine: PL;  
 GTIN: 4044918942140;  
 Customs tariff number: 85369010000;  
 Pret: 1,91 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/stackable-2-conductor-pcb-terminal-block-0-75-mm2-pin-spacing-10-10-16-mm-1-pole-push-wire-0-75-mm2-light-green-136844>