


Furnizor: **Sc Trivolt Distribution SRL**
 Reg. com.: J23/3300/2016
 CIF: RO36421140
 Adresa: Strada Apusului nr 3 (primul
 sens giratoriu Tehodor Pallady-
 Autostrada Soarelui), Catelu, Ilfov
 Banca: BRD
 IBAN: RO34BRDE441SV13182234410

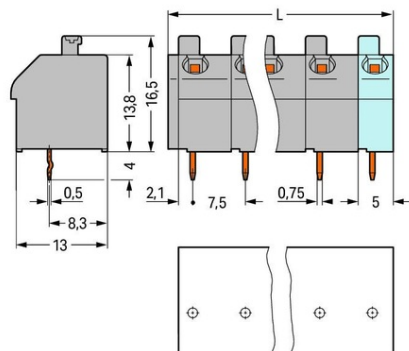

**WAGO PCB TERMINAL BLOCK; PUSH-BUTTON; 1.5 MM²; PIN
 SPACING 7.5 MM; 5-POLE; PUSH-IN CAGE CLAMP®; 1.50 MM²;
 BLUE**

Ratings per: IEC/EN 60664-1;
 Tensiune nominala (III/3): 500; V
 Tensiune nominala de supratensiune (III/3): 6; kV
 Tensiune nominala (III/2): 630; V
 Tensiune nominala de supratensiune (III/2): 6; kV
 Tensiune nominala (II/2): 1000; V
 Tensiune nominala de supratensiune (II/2): 6; kV
 Curent nominal: 17,5; A
 Legend (ratings): (III / 2) $\hat{\%}$ ™ Overvoltage category III / Pollution degree 2;
 Tensiune nominala UL (Use Group B): 300; V
 Curent nominal UL (Use Group B): 10; A
 Tensiune nominala UL (Use Group D): 300; V
 Curent nominal UL (Use Group D): 2; A
 Certificari: UL 1059;
 Tensiune nominala CSA (Use Group B): 300; V
 Curent nominal CSA (Use Group B): 10; A
 Tensiune nominala CSA (Use Group D): 300; V
 Curent nominal CSA (Use Group D): 10; A
 Tehnologie conexiune: Push-in CAGE CLAMP®;
 Tip actionare: Push-button;
 Solid conductor: 0,5 ... 1,5 mm² / 20 ... 14 AWG;
 Fine-stranded conductor: 0,75 ... 1,5 mm² / 18 ... 16 AWG;
 Fine-stranded conductor; with insulated ferrule: 0,5 ... 1 mm²;
 Fine-stranded conductor; with uninsulated ferrule: 0,5 ... 1 mm²;
 Strip length: 9 ... 10 mm / 0.35 ... 0.39 inch;
 Conductor connection direction to PCB: 45; °
 Numar poli: 5;
 Numar total de conexiuni: 5;
 Total number of potentials: 5;
 Numar tipuri de conexiuni: 1;
 Numar nivele: 1;
 Distanta intre pini: 7,5 mm / 0.295 inch;
 Latime: 36,5 mm / 1.437 inch;
 Inaltime: 20,5 mm / 0.807 inch;
 Inaltime de la fata: 16,5 mm / 0.65 inch;
 Adancime: 13 mm / 0.512 inch;
 Lungimea pinului de contact: 4; mm
 Solder pin dimensions: 0,5 x 0,75 mm;
 Diametrul de gaurire cu toleranta: 1 (+0,1) mm;
 PCB contact: THT;
 Solder pin arrangement: over the entire terminal strip (in-line);
 Number of solder pins per potential: 1;
 Culoare: blue;
 Material group: I;
 Material izolator: Polyamide 66 (PA 66);
 Flammability class per UL94: V0;
 Clamping spring material: Chrome nickel spring steel (CrNi);
 Contact material: Cupru electrolitic(ECu);
 Contact plating: tin-plated;
 Fire load: 0,141; MJ
 Greutate: 6; g
 Temperatura lucru: -60 ... +105 °C;
 Product Group: 4 (Printed Circuit);
 Tip ambalare: BOX;
 Tara de origine: PL;
 GTIN: 4044918304306;
 Customs tariff number: 85369010000;
 Pret: 8,72 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/pcb-terminal-block-push-button-1-5-mm2-pin-spacing-7-5-mm-5-pole-push-in-cage-clamp-1-50-mm2-blue-136992>