


Furnizor: **Sc Trivolt Distribution SRL**
 Reg. com.: J23/3300/2016
 CIF: RO36421140
 Adresa: Strada Apusului nr 3 (primul
 sens giratoriu Tehodor Pallady-
 Autostrada Soarelui), Catelu, Ilfov
 Banca: BRD
 IBAN: RO34BRDE441SV13182234410

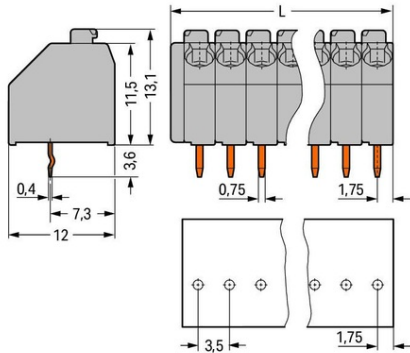

**WAGO PCB TERMINAL BLOCK; PUSH-BUTTON; 1.5 MM²; PIN
 SPACING 3.5 MM; 22-POLE; PUSH-IN CAGE CLAMP®; 1,50 MM²;
 ORANGE**

Ratings per: IEC/EN 60664-1;
 Tensiune nominala (III/3): 160; V
 Tensiune nominala de supratensiune (III/3): 2,5; kV
 Tensiune nominala (III/2): 160; V
 Tensiune nominala de supratensiune (III/2): 2,5; kV
 Tensiune nominala (II/2): 320; V
 Tensiune nominala de supratensiune (II/2): 2,5; kV
 Curent nominal: 8; A
 Legend (ratings): (III / 2) \hat{a} %TM Overvoltage category III / Pollution degree 2;
 Tensiune nominala UL (Use Group B): 300; V
 Curent nominal UL (Use Group B): 5; A
 Tensiune nominala UL (Use Group D): 300; V
 Curent nominal UL (Use Group D): 5; A
 Certificari: UL 1059;
 Tensiune nominala CSA (Use Group B): 300; V
 Curent nominal CSA (Use Group B): 10; A
 Tensiune nominala CSA (Use Group D): 300; V
 Curent nominal CSA (Use Group D): 10; A
 Tehnologie conexiune: Push-in CAGE CLAMP®;
 Tip actionare: Push-button;
 Solid conductor: 0.2 ... 1.5 mm² / 24 ... 16 AWG;
 Fine-stranded conductor: 0.2 ... 1.5 mm² / 24 ... 16 AWG;
 Fine-stranded conductor; with insulated ferrule: 0.25 ... 1 mm²;
 Fine-stranded conductor; with uninsulated ferrule: 0.25 ... 1 mm²;
 Strip length: 8.5 ... 9.5 mm / 0.33 ... 0.37 inch;
 Conductor connection direction to PCB: 45; °
 Numar poli: 22;
 Numar total de conexiuni: 22;
 Total number of potentials: 22;
 Numar tipuri de conexiuni: 1;
 Numar nivele: 1;
 Distanta intre pini: 3.5 mm / 0.138 inch;
 Latime: 78.5 mm / 3.091 inch;
 Inaltime: 16.7 mm / 0.657 inch;
 Inaltime de la fata: 13.1 mm / 0.516 inch;
 Adancime: 12 mm / 0.472 inch;
 Lungimea pinului de contact: 3,6; mm
 Solder pin dimensions: 0.4 x 0.75 mm;
 Diametrul de gaurire cu toleranta: 1 (+0.1) mm;
 PCB contact: THT;
 Solder pin arrangement: over the entire terminal strip, in line;
 Number of solder pins per potential: 1;
 Culoare: orange;
 Material group: I;
 Material izolator: Polyamide 66 (PA 66);
 Flammability class per UL94: V0;
 Clamping spring material: Chrome nickel spring steel (CrNi);
 Contact material: Cupru electrolitic(ECu);
 Contact plating: tin-plated;
 Fire load: 0,204; MJ
 Greutate: 10,1; g
 Temperatura lucru: -60 ... +105 °C;
 Product Group: 4 (Printed Circuit);
 Tip ambalare: BOX;
 Tara de origine: CH;
 GTIN: 4017332329200;
 Customs tariff number: 85369010000;
 Pret: 23,56 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/pcb-terminal-block-push-button-1-5-mm2-pin-spacing-3-5-mm-22-pole-push-in-cage-clamp-1-50-mm2-orange-137140>