


Furnizor: **Sc Trivolt Distribution SRL**  
 Reg. com.: J23/3300/2016  
 CIF: RO36421140  
 Adresa: Strada Apusului nr 3 ( primul  
 sens giratoriu Tehodor Pallady-  
 Autostrada Soarelui), Catelu, Ilfov  
 Banca: BRD  
 IBAN: RO34BRDE441SV13182234410

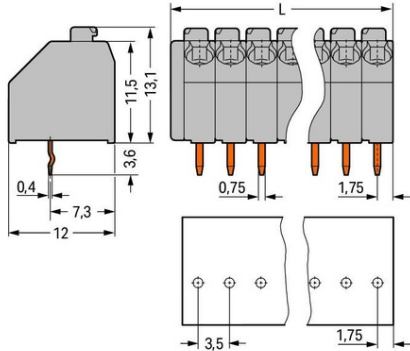

**WAGO PCB TERMINAL BLOCK; PUSH-BUTTON; 1.5 MM<sup>2</sup>; PIN  
 SPACING 3.5 MM; 22-POLE; PUSH-IN CAGE CLAMP®; 1,50 MM<sup>2</sup>;  
 GRAY**

Ratings per: IEC/EN 60664-1;  
 Tensiune nominala (III/3): 160; V  
 Tensiune nominala de supratensiune (III/3): 2,5; kV  
 Tensiune nominala (III/2): 160; V  
 Tensiune nominala de supratensiune (III/2): 2,5; kV  
 Tensiune nominala (II/2): 320; V  
 Tensiune nominala de supratensiune (II/2): 2,5; kV  
 Curent nominal: 8; A  
 Legend (ratings): (III / 2)  $\hat{a}$ %<sup>TM</sup> Overvoltage category III / Pollution degree 2;  
 Tensiune nominala UL (Use Group B): 300; V  
 Curent nominal UL (Use Group B): 5; A  
 Tensiune nominala UL (Use Group D): 300; V  
 Curent nominal UL (Use Group D): 5; A  
 Certificari: UL 1059;  
 Tensiune nominala CSA (Use Group B): 300; V  
 Curent nominal CSA (Use Group B): 10; A  
 Tensiune nominala CSA (Use Group D): 300; V  
 Curent nominal CSA (Use Group D): 10; A  
 Tehnologie conexiune: Push-in CAGE CLAMP®;  
 Tip actionare: Push-button;  
 Solid conductor: 0.2 ... 1.5 mm<sup>2</sup> / 24 ... 16 AWG;  
 Fine-stranded conductor: 0.2 ... 1.5 mm<sup>2</sup> / 24 ... 16 AWG;  
 Fine-stranded conductor; with insulated ferrule: 0.25 ... 1 mm<sup>2</sup>;  
 Fine-stranded conductor; with uninsulated ferrule: 0.25 ... 1 mm<sup>2</sup>;  
 Strip length: 8.5 ... 9.5 mm / 0.33 ... 0.37 inch;  
 Conductor connection direction to PCB: 45; °  
 Numar poli: 22;  
 Numar total de conexiuni: 22;  
 Total number of potentials: 22;  
 Numar tipuri de conexiuni: 1;  
 Numar nivele: 1;  
 Distanta intre pini: 3.5 mm / 0.138 inch;  
 Latime: 78.5 mm / 3.091 inch;  
 Inaltime: 16.7 mm / 0.657 inch;  
 Inaltime de la fata: 13.1 mm / 0.516 inch;  
 Adancime: 12 mm / 0.472 inch;  
 Lungimea pinului de contact: 3,6; mm  
 Solder pin dimensions: 0.4 x 0.75 mm;  
 Diametrul de gaurire cu toleranta: 1 (+0.1) mm;  
 PCB contact: THT;  
 Solder pin arrangement: over the entire terminal strip, in line;  
 Number of solder pins per potential: 1;  
 Culoare: gray;  
 Material group: I;  
 Material izolator: Polyamide 66 (PA 66);  
 Flammability class per UL94: V0;  
 Clamping spring material: Chrome nickel spring steel (CrNi);  
 Contact material: Cupru electrolitic(ECu);  
 Contact plating: tin-plated;  
 Fire load: 0,226; MJ  
 Greutate: 10,2; g  
 Temperatura lucru: -60 ... +105 °C;  
 Product Group: 4 (Printed Circuit);  
 Tip ambalare: BOX;  
 Tara de origine: CH;  
 GTIN: 4044918648103;  
 Customs tariff number: 85369010000;  
 Pret: 23,58 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/pcb-terminal-block-push-button-1-5-mm2-pin-spacing-3-5-mm-22-pole-push-in-cage-clamp-1-50-mm2-gray-137144>