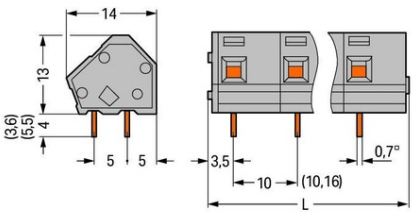


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

 <p>The drawing shows three views of the terminal block: a top view, a side view, and a perspective view. Dimensions are provided in millimeters and inches. The top view shows a width of 14 mm and a height of 13 mm. The side view shows a height of 4 mm and a width of 5 mm for the terminal strip. The perspective view shows a length of 10 mm between terminals and a total length of 10.16 mm. A dimension of 3.5 mm is shown for the terminal width, and 0.7 mm for the terminal height.</p>	<p align="center">WAGO PCB TERMINAL BLOCK; 2.5 MM²; PIN SPACING 10/10.16 MM; 16-POLE; SUITABLE FOR EX-E APPLICATIONS; CAGE CLAMP[®]; COMMONING OPTION; 2.50 MM²; LIGHT GRAY</p> <p>Ratings per: ATEX: PTB 06 ATEX 1061 U / IECEx: PTB 06.0042 U; Legend (ratings): (III / 2) ^{â%}™ Overvoltage category III / Pollution degree 2; Tensiune nominala UL (Use Group B): 300; V Curent nominal UL (Use Group B): 15; A Tensiune nominala UL (Use Group D): 300; V Curent nominal UL (Use Group D): 10; A Certificari: UL 1059; Tensiune nominala CSA (Use Group B): 300; V Curent nominal CSA (Use Group B): 15; A Tensiune nominala CSA (Use Group D): 300; V Curent nominal CSA (Use Group D): 10; A Tensiune nominala EN (Ex e II): 440; V Curent nominal (Ex e II): 16; A Tehnologie conexiune: CAGE CLAMP[®]; Tip actionare: Operating tool; Solid conductor: 0.08 ... 2.5 mm² / 28 ... 12 AWG; Fine-stranded conductor: 0.08 ... 2.5 mm² / 28 ... 12 AWG; Fine-stranded conductor; with insulated ferrule: 0.25 ... 1.5 mm²; Fine-stranded conductor; with uninsulated ferrule: 0.25 ... 1.5 mm²; Strip length: 5 ... 6 mm / 0.2 ... 0.24 inch; Conductor connection direction to PCB: 45; ° Numar poli: 16; Numar total de conexiuni: 16; Total number of potentials: 16; Numar tipuri de conexiuni: 1; Numar nivele: 1; Note (conductor cross-section): 12 AWG: THHN, THWN; Distanta intre pini: 10/10.16 mm / 0.394/0.4 inch; Latime: 162.3 mm / 6.39 inch; Inaltime: 17 mm / 0.669 inch; Inaltime de la fata: 13 mm / 0.512 inch; Adancime: 14 mm / 0.551 inch; Lungimea pinului de contact: 4; mm Solder pin dimensions: 0.7 x 0.7 mm; Diametrul de gaurire cu toleranta: 1.1 (+0.1) mm; PCB contact: THT; Solder pin arrangement: over the entire terminal strip, in line; Number of solder pins per potential: 2; Culoare: light gray; Material group: I; Material izolator: Polyamide 66 (PA 66); Flammability class per UL94: V0; Clamping spring material: Chrome nickel spring steel (CrNi); Contact material: Cupru electrolitic (ECu); Contact plating: tin-plated; Fire load: 0,388; MJ Greutate: 20,5; g Temperatura lucru: -60 ... +105 °C; Product Group: 4 (Printed Circuit); Tip ambalare: BOX; Tara de origine: CH; GTIN: 4044918773669; Customs tariff number: 85369010000; Pret: 44,38 lei (TVA inclus)</p> <p>Detalii online: https://www.materialelectrice.ro/pcb-terminal-block-2-5-mm2-pin-spacing-10-10-16-mm-16-pole-suitable-for-ex-e-applications-cage-clamp-commoning-option-2-50-mm2-light-gray-137227</p>
---	---