


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

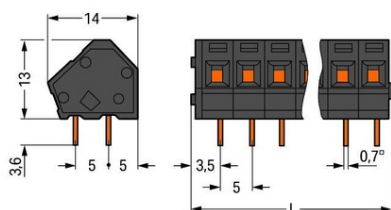

**WAGO THR PCB TERMINAL BLOCK; 2.5 MM²; PIN SPACING 5 MM;
6-POLE; CAGE CLAMP[®]; IN TAPE-AND-REEL PACKAGING;
COMMONING OPTION; 2,50 MM²; BLACK**

Ratings per: IEC/EN 60664-1;
Tensiune nominala (III/3): 200; V
Tensiune nominala de supratensiune (III/3): 4; kV
Tensiune nominala (III/2): 320; V
Tensiune nominala de supratensiune (III/2): 4; kV
Tensiune nominala (II/2): 320; V
Tensiune nominala de supratensiune (II/2): 4; kV
Curent nominal: 24; A
Legend (ratings): (III / 2) \hat{a} %TM Overvoltage category III / Pollution degree 2;
Tensiune nominala UL (Use Group B): 300; V
Curent nominal UL (Use Group B): 15; A
Tensiune nominala UL (Use Group D): 300; V
Curent nominal UL (Use Group D): 10; A
Certificari: UL 1059;
Tensiune nominala CSA (Use Group B): 300; V
Curent nominal CSA (Use Group B): 15; A
Tensiune nominala CSA (Use Group D): 300; V
Curent nominal CSA (Use Group D): 10; A
Tehnologie conexiune: CAGE CLAMP[®];
Tip actionare: Operating tool;
Solid conductor: 0.08 ... 2.5 mm² / 28 ... 12 AWG;
Fine-stranded conductor: 0.08 ... 2.5 mm² / 28 ... 12 AWG;
Fine-stranded conductor; with insulated ferrule: 0.25 ... 1.5 mm²;
Fine-stranded conductor; with uninsulated ferrule: 0.25 ... 1.5 mm²;
Strip length: 5 ... 6 mm / 0.2 ... 0.24 inch;
Conductor connection direction to PCB: 45; °
Numar poli: 6;
Numar total de conexiuni: 6;
Total number of potentials: 6;
Numar tipuri de conexiuni: 1;
Numar nivele: 1;
Note (conductor cross-section): 12 AWG: THHN, THWN;
Distanta intre pini: 5 mm / 0.197 inch;
Latime: 32.3 mm / 1.272 inch;
Inaltime: 16.6 mm / 0.654 inch;
Inaltime de la fata: 13 mm / 0.512 inch;
Adancime: 14 mm / 0.551 inch;
Lungimea pinului de contact: 3,6; mm
Solder pin dimensions: 0.7 x 0.7 mm;
Diametru placat prin gaura (THR): 1.1 (+0.1) mm;
Reel diameter of tape-and-reel packaging: 330; mm
Tape Latime: 44; mm
PCB contact: THR;
Solder pin arrangement: over the entire terminal strip, in line;
Number of solder pins per potential: 2;
Culoare: black;
Material group: III a;
Material izolator: Polyamide 46 (PA 46);
Flammability class per UL94: V2;
Clamping spring material: Chrome nickel spring steel (CrNi);
Contact material: Cupru electrolitic(ECu);
Contact plating: tin-plated;
Greutate: 5,5; g
Temperatura lucru: -60 ... +115 °C;
Tip ambalare: BOX;
Tara de origine: DE;
GTIN: 4055143469685;
Customs tariff number: 85369010000;
Pret: 12,84 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/thr-pcb-terminal-block-2-5-mm2-pin-spacing-5-mm-6-pole-cage-clamp-in-tape-and-reel-packaging-commoning-option-2-50-mm2-black-137307>