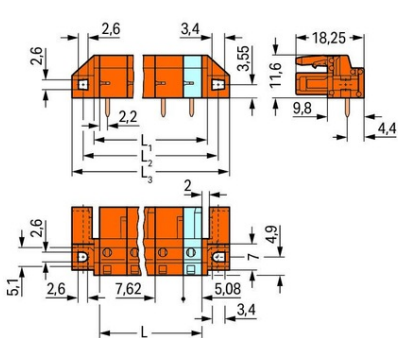


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

 <p>The technical drawing shows three views of the WAGO THT Female Header. The top view shows a 4-pole connector with dimensions: 2.6 mm between poles, 3.4 mm pole width, 3.55 mm total width, 11.6 mm height, 18.25 mm mounting flange height, 9.8 mm mounting flange width, and 4.4 mm mounting flange thickness. The side view shows a 2-pole connector with dimensions: 2.6 mm between poles, 2.2 mm pole width, 7.62 mm total width, 5.08 mm height, 3.4 mm mounting flange thickness, and 4.9 mm mounting flange height. The bottom view shows a 4-pole connector with dimensions: 5.1 mm between poles, 2.6 mm pole width, 7.62 mm total width, 5.08 mm height, 3.4 mm mounting flange thickness, and 4.9 mm mounting flange height.</p>	<p>WAGO THT FEMALE HEADER; 0.6 X 1.0 MM SOLDER PIN; ANGLED; SPACER FLANGE; PIN SPACING 7.62 MM; 8-POLE; ORANGE</p> <p>Ratings per: IEC/EN 60664-1; Tensiune nominala (III/3): 500; V Tensiune nominala de supratensiune (III/3): 6; kV Tensiune nominala (III/2): 630; V Tensiune nominala de supratensiune (III/2): 6; kV Tensiune nominala (II/2): 1000; V Tensiune nominala de supratensiune (II/2): 6; kV Curent nominal: 12; A Legend (ratings): (III / 2) $\hat{a}\%$™ Overvoltage category III / Pollution degree 2; Tensiune nominala UL (Use Group B): 300; V Curent nominal UL (Use Group B): 15; A Tensiune nominala UL (Use Group D): 300; V Curent nominal UL (Use Group D): 10; A Certificari: UL 1059; Tensiune nominala UL 1977: 600; V Curent nominal UL 1977: 15; A Tensiune nominala CSA (Use Group B): 300; V Curent nominal CSA (Use Group B): 15; A Tensiune nominala CSA (Use Group D): 300; V Curent nominal CSA (Use Group D): 10; A Numar poli: 8; Total number of potentials: 8; Numar tipuri de conexiuni: 1; Numar nivele: 1; Distanta intre pini: 7.62 mm / 0.3 inch; Latime: 73.22 mm / 2.883 inch; Inaltime: 16.6 mm / 0.654 inch; Inaltime de la fata: 11.6 mm / 0.457 inch; Adancime: 18.25 mm / 0.719 inch; Lungimea pinului de contact: 5; mm Solder pin dimensions: 0.6 x 1 mm; Diametrul de gaurire cu toleranta: 1.3 (+0.1) mm; Tip montaj: Mounting flange; Tip montaj: Flush mounting; Panel mounting; Tip contact (pluggable connector): Conector mama/priza; Connector (connection type): for PCBs; Mismatching protection: No; Mating direction to the PCB: 0; ° PCB contact: THT; Solder pin arrangement: over the entire female connector, in line; Number of solder pins per potential: 1; Culoare: orange; Material group: I; Material izolator: Polyamide 66 (PA 66); Flammability class per UL94: V0; Contact material: Copper alloy; Contact plating: tin-plated; Fire load: 0,197; MJ Greutate: 9,7; g Temperatura lucru: -60 ... +85 °C; Product Group: 3 (Multi Conn. System); Tip ambalare: BOX; Tara de origine: DE; GTIN: 4017332538602; Customs tariff number: 85366990990; Pret: 24,04 lei (TVA inclus)</p> <p>Detalii online: https://www.materialelectrice.ro/tht-female-header-0-6-x-1-0-mm-solder-pin-angled-spacer-flange-pin-spacing-7-62-mm-8-pole-orange-137438</p>
---	---