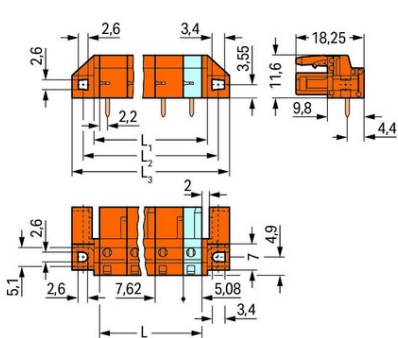


Furnizor: **Sc Trivolt Distribution SRL**  
Reg. com.: J23/3300/2016  
CIF: RO36421140  
Adresa: Strada Apusului nr 3 ( primul  
sens giratoriu Tehodor Pallady-  
Autostrada Soarelui), Catelu, Ilfov  
Banca: BRD  
IBAN: RO34BRDE441SV13182234410

 <p>The technical drawing shows three views of the WAGO THT Female Header. The top view shows a 2-pole connector with a pin spacing of 7.62 mm. Dimensions include a total width of 27.5 mm, a mounting flange width of 11.6 mm, and a solder pin length of 18.25 mm. The side view shows a height of 16.6 mm. The bottom view shows a 2-pole connector with a pin spacing of 7.62 mm and a total width of 27.5 mm. Dimensions include a mounting flange width of 11.6 mm, a solder pin length of 18.25 mm, and a contact length of 5 mm.</p>	<p><b>WAGO THT FEMALE HEADER; 0.6 X 1.0 MM SOLDER PIN; ANGLED; SPACER FLANGE; PIN SPACING 7.62 MM; 2-POLE; ORANGE</b></p> <p>Ratings per: IEC/EN 60664-1; Tensiune nominala (III/3): 500; V Tensiune nominala de supratensiune (III/3): 6; kV Tensiune nominala (III/2): 630; V Tensiune nominala de supratensiune (III/2): 6; kV Tensiune nominala (II/2): 1000; V Tensiune nominala de supratensiune (II/2): 6; kV Curent nominal: 12; A Legend (ratings): (III / 2) <math>\hat{a}</math>%™ Overvoltage category III / Pollution degree 2; Tensiune nominala UL (Use Group B): 300; V Curent nominal UL (Use Group B): 15; A Tensiune nominala UL (Use Group D): 300; V Curent nominal UL (Use Group D): 10; A Certificari: UL 1059; Tensiune nominala UL 1977: 600; V Curent nominal UL 1977: 15; A Tensiune nominala CSA (Use Group B): 300; V Curent nominal CSA (Use Group B): 15; A Tensiune nominala CSA (Use Group D): 300; V Curent nominal CSA (Use Group D): 10; A Numar poli: 2; Total number of potentials: 2; Numar tipuri de conexiuni: 1; Numar nivele: 1; Distanta intre pini: 7.62 mm / 0.3 inch; Latime: 27.5 mm / 1.083 inch; Inaltime: 16.6 mm / 0.654 inch; Inaltime de la fata: 11.6 mm / 0.457 inch; Adancime: 18.25 mm / 0.719 inch; Lungimea pinului de contact: 5; mm Solder pin dimensions: 0.6 x 1 mm; Diametrul de gaurire cu toleranta: 1.3 (+0.1) mm; Tip montaj: Mounting flange; Tip montaj: Flush mounting; Panel mounting; Tip contact (pluggable connector): Conector mama/priza; Connector (connection type): for PCBs; Mismatching protection: No; Mating direction to the PCB: 0; ° PCB contact: THT; Solder pin arrangement: over the entire female connector, in line; Number of solder pins per potential: 1; Culoare: orange; Material group: I; Material izolator: Polyamide 66 (PA 66); Flammability class per UL94: V0; Contact material: Copper alloy; Contact plating: tin-plated; Fire load: 0,066; MJ Greutate: 3; g Temperatura lucru: -60 ... +85 °C; Product Group: 3 (Multi Conn. System); Tip ambalare: BOX; Tara de origine: DE; GTIN: 4017332538367; Customs tariff number: 85366990990; Pret: 8,24 lei (TVA inclus)</p> <p>Detalii online: <a href="https://www.materialeelectrice.ro/tht-female-header-0-6-x-1-0-mm-solder-pin-angled-spacer-flange-pin-spacing-7-62-mm-2-pole-orange-137480">https://www.materialeelectrice.ro/tht-female-header-0-6-x-1-0-mm-solder-pin-angled-spacer-flange-pin-spacing-7-62-mm-2-pole-orange-137480</a></p>
--	--