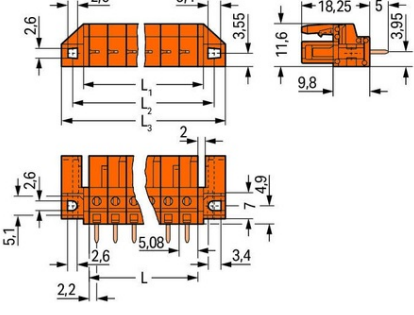


Furnizor: **Sc Trivolt Distribution SRL**  
Reg. com.: J23/3300/2016  
CIF: RO36421140  
Adresa: Strada Apusului nr 3 ( primul  
sens giratoriu Tehodor Pallady-  
Autostrada Soarelui), Catelu, Ilfov  
Banca: BRD  
IBAN: RO34BRDE441SV13182234410

 <p>The technical drawing shows three views of the WAGO THT Female Header. The top view shows a rectangular component with 18 pins, with dimensions 2.6 mm for the width of a single pin, 3.4 mm for the width of a pair of pins, and 3.55 mm for the total width. The side view shows a height of 11.6 mm and a depth of 9.8 mm. The front view shows a height of 5.1 mm, a pin spacing of 5.08 mm, and a pin diameter of 2.2 mm. The component is orange and has a straight spacer flange.</p>	<p><b>WAGO THT FEMALE HEADER; 0.6 X 1.0 MM SOLDER PIN; STRAIGHT; SPACER FLANGE; PIN SPACING 5.08 MM; 18-POLE; ORANGE</b></p> <p>Ratings per: IEC/EN 60664-1; Tensiune nominala (III/3): 320; V Tensiune nominala de supratensiune (III/3): 4; kV Tensiune nominala (III/2): 320; V Tensiune nominala de supratensiune (III/2): 4; kV Tensiune nominala (II/2): 630; V Tensiune nominala de supratensiune (II/2): 4; kV Curent nominal: 12; A Legend (ratings): (III / 2) %™ Overvoltage category III / Pollution degree 2; Tensiune nominala UL (Use Group B): 300; V Curent nominal UL (Use Group B): 15; A Tensiune nominala UL (Use Group D): 300; V Curent nominal UL (Use Group D): 10; A Certificari: UL 1059; Tensiune nominala UL 1977: 600; V Curent nominal UL 1977: 15; A Tensiune nominala CSA (Use Group B): 300; V Curent nominal CSA (Use Group B): 15; A Tensiune nominala CSA (Use Group D): 300; V Curent nominal CSA (Use Group D): 10; A Numar poli: 18; Numar total de conexiuni: 18; Total number of potentials: 18; Numar tipuri de conexiuni: 1; Numar nivele: 1; Distanta intre pini: 5.08 mm / 0.2 inch; Latime: 106.24 mm / 4.183 inch; Inaltime: 23.25 mm / 0.915 inch; Inaltime de la fata: 18.25 mm / 0.719 inch; Adancime: 11.6 mm / 0.457 inch; Lungimea pinului de contact: 5; mm Solder pin dimensions: 0.6 x 1 mm; Diametrul de gaurire cu toleranta: 1.3 (+0.1) mm; Tip montaj: Mounting flange; Tip montaj: Flush mounting; Panel mounting; Tip contact (pluggable connector): Conector mama/priza; Connector (connection type): for PCBs; Mismatching protection: No; Mating direction to the PCB: 90; ° PCB contact: THT; Solder pin arrangement: over the entire female connector, in line; Number of solder pins per potential: 1; Culoare: orange; Material group: I; Material izolator: Polyamide 66 (PA 66); Flammability class per UL94: V0; Contact material: Copper alloy; Contact plating: tin-plated; Fire load: 0,283; MJ Greutate: 16,5; g Temperatura lucru: -60 ... +85 °C; Tip ambalare: BOX; Tara de origine: DE; GTIN: 4050821637875; Customs tariff number: 85366990990; Pret: 47,76 lei (TVA inclus)</p> <p>Detalii online: <a href="https://www.materialelectrice.ro/tht-female-header-0-6-x-1-0-mm-solder-pin-straight-spacer-flange-pin-spacing-5-08-mm-18-pole-orange-138160">https://www.materialelectrice.ro/tht-female-header-0-6-x-1-0-mm-solder-pin-straight-spacer-flange-pin-spacing-5-08-mm-18-pole-orange-138160</a></p>
---	---