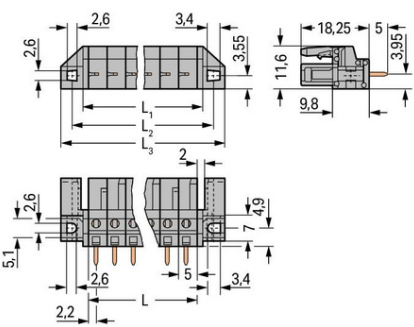


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

 Technical drawing of the WAGO THT Female Header showing three views: top, side, and front. Dimensions are in mm. Top view shows a 20-pole header with a 5 mm pin spacing. Side view shows the height of the header and the position of the solder pins. Front view shows the profile of the header and the position of the solder pins. Key dimensions include: 2.6 mm (pin width), 3.4 mm (pin pitch), 3.55 mm (header height), 11.6 mm (header width), 18.25 mm (header length), 5 mm (pin spacing), 9.8 mm (header thickness), 2 mm (solder pin diameter), 7 mm (solder pin length), 4.9 mm (solder pin height), 2.2 mm (solder pin width), 5.1 mm (solder pin height).	WAGO THT FEMALE HEADER; 0.6 X 1.0 MM SOLDER PIN; STRAIGHT; SPACER FLANGE; PIN SPACING 5 MM; 20-POLE; GRAY Ratings per: IEC/EN 60664-1; Tensiune nominala (III/3): 320; V Tensiune nominala de supratensiune (III/3): 4; kV Tensiune nominala (III/2): 320; V Tensiune nominala de supratensiune (III/2): 4; kV Tensiune nominala (II/2): 630; V Tensiune nominala de supratensiune (II/2): 4; kV Curent nominal: 12; A Legend (ratings): (III / 2) %™ Overvoltage category III / Pollution degree 2; Tensiune nominala UL (Use Group B): 300; V Curent nominal UL (Use Group B): 15; A Tensiune nominala UL (Use Group D): 300; V Curent nominal UL (Use Group D): 10; A Certificari: UL 1059; Tensiune nominala UL 1977: 600; V Curent nominal UL 1977: 15; A Tensiune nominala CSA (Use Group B): 300; V Curent nominal CSA (Use Group B): 15; A Tensiune nominala CSA (Use Group D): 300; V Curent nominal CSA (Use Group D): 10; A Numar poli: 20; Total number of potentials: 20; Numar tipuri de conexiuni: 1; Numar nivele: 1; Distanta intre pini: 5 mm / 0.197 inch; Latime: 114.8 mm / 4.52 inch; Inaltime: 23.25 mm / 0.915 inch; Inaltime de la fata: 18.25 mm / 0.719 inch; Adancime: 11.6 mm / 0.457 inch; Lungimea pinului de contact: 5; mm Solder pin dimensions: 0.6 x 1 mm; Diametrul de gaurire cu toleranta: 1.3 (+0.1) mm; Tip montaj: Mounting flange; Tip montaj: Flush mounting; Panel mounting; Tip contact (pluggable connector): Conector mama/priza; Connector (connection type): for PCBs; Mismatching protection: No; Mating direction to the PCB: 90; ° PCB contact: THT; Solder pin arrangement: over the entire female connector, in line; Number of solder pins per potential: 1; Culoare: gray; Material group: I; Material izolator: Polyamide 66 (PA 66); Flammability class per UL94: V0; Contact material: Copper alloy; Contact plating: tin-plated; Fire load: 0,349; MJ Greutate: 19,4; g Temperatura lucru: -60 ... +85 °C; Tip ambalare: BOX; Tara de origine: DE; GTIN: 4050821637769; Customs tariff number: 85366990990; Pret: 52,73 lei (TVA inclus) Detalii online: https://www.materialelectrice.ro/tht-female-header-0-6-x-1-0-mm-solder-pin-straight-spacer-flange-pin-spacing-5-mm-20-pole-gray-138257
---	---