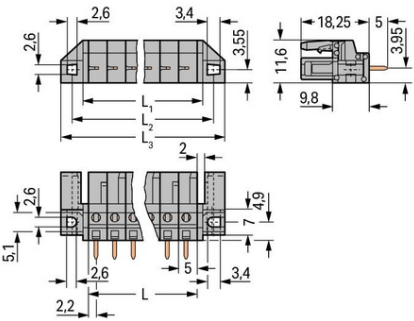


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

 <p>The technical drawing shows three views of the WAGO THT Female Header. The top view shows a 11-pole header with a 5 mm pin spacing. Dimensions include a total width of 69.8 mm, a mounting flange width of 18.25 mm, and a contact length of 5 mm. The side view shows a height of 23.25 mm and a mounting flange height of 11.6 mm. The detail view shows the solder pin dimensions of 0.6 x 1 mm and a diameter of 1.3 mm.</p>	<p>WAGO THT FEMALE HEADER; 0.6 X 1.0 MM SOLDER PIN; STRAIGHT; SPACER FLANGE; PIN SPACING 5 MM; 11-POLE; GRAY</p> <p>Ratings per: IEC/EN 60664-1; Tensiune nominala (III/3): 320; V Tensiune nominala de supratensiune (III/3): 4; kV Tensiune nominala (III/2): 320; V Tensiune nominala de supratensiune (III/2): 4; kV Tensiune nominala (II/2): 630; V Tensiune nominala de supratensiune (II/2): 4; kV Curent nominal: 12; A Legend (ratings): (III / 2) \hat{a}%™ Overvoltage category III / Pollution degree 2; Tensiune nominala UL (Use Group B): 300; V Curent nominal UL (Use Group B): 15; A Tensiune nominala UL (Use Group D): 300; V Curent nominal UL (Use Group D): 10; A Certificari: UL 1059; Tensiune nominala UL 1977: 600; V Curent nominal UL 1977: 15; A Tensiune nominala CSA (Use Group B): 300; V Curent nominal CSA (Use Group B): 15; A Tensiune nominala CSA (Use Group D): 300; V Curent nominal CSA (Use Group D): 10; A Numar poli: 11; Total number of potentials: 11; Numar tipuri de conexiuni: 1; Numar nivele: 1; Distanta intre pini: 5 mm / 0.197 inch; Latime: 69.8 mm / 2.748 inch; Inaltime: 23.25 mm / 0.915 inch; Inaltime de la fata: 18.25 mm / 0.719 inch; Adancime: 11.6 mm / 0.457 inch; Lungimea pinului de contact: 5; mm Solder pin dimensions: 0.6 x 1 mm; Diametrul de gaurire cu toleranta: 1.3 (+0.1) mm; Tip montaj: Mounting flange; Tip montaj: Flush mounting; Panel mounting; Tip contact (pluggable connector): Conector mama/priza; Connector (connection type): for PCBs; Mismating protection: No; Mating direction to the PCB: 90; ° PCB contact: THT; Solder pin arrangement: over the entire female connector, in line; Number of solder pins per potential: 1; Culoare: gray; Material group: I; Material izolator: Polyamide 66 (PA 66); Flammability class per UL94: V0; Contact material: Copper alloy; Contact plating: tin-plated; Fire load: 0,205; MJ Greutate: 11,1; g Temperatura lucru: -60 ... +85 °C; Tip ambalare: BOX; Tara de origine: DE; GTIN: 4050821637691; Customs tariff number: 85366990990; Pret: 30,40 lei (TVA inclus)</p> <p>Detalii online: https://www.materialelectrice.ro/tht-female-header-0-6-x-1-0-mm-solder-pin-straight-spacer-flange-pin-spacing-5-mm-11-pole-gray-138322</p>
--	---