


Furnizor: **Sc Trivolt Distribution SRL**
 Reg. com.: J23/3300/2016
 CIF: RO36421140
 Adresa: Strada Apusului nr 3 (primul
 sens giratoriu Tehodor Pallady-
 Autostrada Soarelui), Catelu, Ilfov
 Banca: BRD
 IBAN: RO34BRDE441SV13182234410

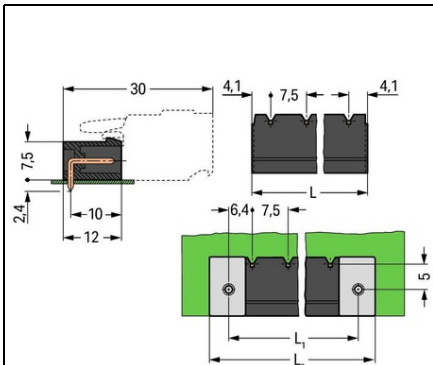

**WAGO THR MALE HEADER; 1.2 X 1.2 MM SOLDER PIN; ANGLED; IN
 TAPE-AND-REEL PACKAGING; PIN SPACING 7.5 MM; 4-POLE; BLACK**

Ratings per: IEC/EN 60664-1;
 Tensiune nominala (III/3): 500; V
 Tensiune nominala de supratensiune (III/3): 6; kV
 Tensiune nominala (III/2): 630; V
 Tensiune nominala de supratensiune (III/2): 6; kV
 Tensiune nominala (II/2): 1000; V
 Tensiune nominala de supratensiune (II/2): 6; kV
 Curent nominal: 16; A
 Legend (ratings): (III / 2) \hat{a} %™ Overvoltage category III / Pollution degree 2;
 Tensiune nominala UL (Use Group B): 300; V
 Curent nominal UL (Use Group B): 10; A
 Tensiune nominala UL (Use Group D): 300; V
 Curent nominal UL (Use Group D): 10; A
 Certificari: UL 1059;
 Tensiune nominala UL 1977: 600; V
 Curent nominal UL 1977: 15; A
 Tensiune nominala CSA (Use Group B): 300; V
 Curent nominal CSA (Use Group B): 10; A
 Tensiune nominala CSA (Use Group D): 300; V
 Curent nominal CSA (Use Group D): 10; A
 Numar poli: 4;
 Total number of potentials: 4;
 Numar tipuri de conexiuni: 1;
 Numar nivele: 1;
 Distanta intre pini: 7.5 mm / 0.295 inch;
 Latime: 30.7 mm / 1.209 inch;
 Inaltime: 10.8 mm / 0.425 inch;
 Inaltime de la fata: 8.4 mm / 0.331 inch;
 Adancime: 12 mm / 0.472 inch;
 Lungimea pinului de contact: 2,4; mm
 Solder pin dimensions: 1.2 x 1.2 mm;
 Diametru placat prin gaura (THR): 1.7 (+0.1) mm;
 Reel diameter of tape-and-reel packaging: 330; mm
 Tape Latime: 56; mm
 Tip contact (pluggable connector): Conector tata/fisa;
 Connector (connection type): for PCBs;
 Mismatching protection: No;
 Mating direction to the PCB: 0; °
 PCB contact: THR;
 Solder pin arrangement: over the entire male connector, in line;
 Number of solder pins per potential: 1;
 Culoare: black;
 Material group: I;
 Material izolator: Polyphthalamide (PPA GF);
 Flammability class per UL94: V0;
 Contact material: Cupru electrolitic(ECu);
 Contact plating: tin-plated;
 Greutate: 2,1; g
 Temperatura lucru: -60 ... +100 °C;
 Tip ambalare: bag;
 Tara de origine: DE;
 GTIN: 4050821043249;
 Customs tariff number: 85366990990;
 Pret: 9,32 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/thr-male-header-1-2-x-1-2-mm-solder-pin-angled-in-tape-and-reel-packaging-pin-spacing-7-5-mm-4-pole-black-138418>