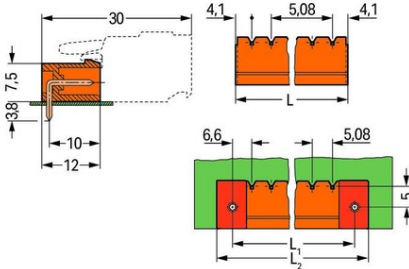


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

 <p>The technical drawing illustrates the dimensions and pin arrangement of the WAGO THT Male Header. It includes a side view showing a total length of 30 mm, a pin height of 7.5 mm, a contact length of 3.8 mm, a pin diameter of 1.4 mm, and a mounting hole diameter of 12 mm. The top view shows a 21-pin arrangement with a pitch of 5.08 mm between pins and a 4.1 mm offset from the edge. The bottom view shows a 6.6 mm wide contact area and a 5.08 mm pitch between the contact points.</p>	<p>WAGO THT MALE HEADER; 1.0 X 1.0 MM SOLDER PIN; ANGLED; PIN SPACING 5.08 MM; 21-POLE; ORANGE</p> <p>Ratings per: IEC/EN 60664-1; Tensiune nominala (III/3): 320; V Tensiune nominala de supratensiune (III/3): 4; kV Tensiune nominala (III/2): 320; V Tensiune nominala de supratensiune (III/2): 4; kV Tensiune nominala (II/2): 630; V Tensiune nominala de supratensiune (II/2): 4; kV Curent nominal: 12; A Legend (ratings): (III / 2) \hat{a}%TM Overvoltage category III / Pollution degree 2; Tensiune nominala UL (Use Group B): 300; V Curent nominal UL (Use Group B): 10; A Tensiune nominala UL (Use Group D): 300; V Curent nominal UL (Use Group D): 10; A Certificari: UL 1059; Tensiune nominala UL 1977: 600; V Curent nominal UL 1977: 10; A Tensiune nominala CSA (Use Group B): 300; V Curent nominal CSA (Use Group B): 10; A Tensiune nominala CSA (Use Group D): 300; V Curent nominal CSA (Use Group D): 10; A Numar poli: 21; Total number of potentials: 21; Numar tipuri de conexiuni: 1; Numar nivele: 1; Distanta intre pini: 5.08 mm / 0.2 inch; Latime: 109.8 mm / 4.323 inch; Inaltime: 12.2 mm / 0.48 inch; Inaltime de la fata: 8.4 mm / 0.331 inch; Adancime: 12 mm / 0.472 inch; Lungimea pinului de contact: 3,8; mm Solder pin dimensions: 1 x 1 mm; Diametrul de gaurire cu toleranta: 1.4 (+0.1) mm; Tip contact (pluggable connector): Conector tata/fisa; Connector (connection type): for PCBs; Mismatching protection: No; Mating direction to the PCB: 0; ° PCB contact: THT; Solder pin arrangement: over the entire male connector, in line; Number of solder pins per potential: 1; Culoare: orange; Material group: I; Material izolator: Polyamide 66 (PA 66); Flammability class per UL94: V0; Contact material: Cupru electrolitic(ECu); Contact plating: tin-plated; Fire load: 0,117; MJ Greutate: 6,8; g Temperatura lucru: -60 ... +100 °C; Product Group: 3 (Multi Conn. System); Tip ambalare: BOX; Tara de origine: DE; GTIN: 4044918867603; Customs tariff number: 85366990990; Pret: 26,62 lei (TVA inclus)</p> <p>Detalii online: https://www.materialelectrice.ro/tht-male-header-1-0-x-1-0-mm-solder-pin-angled-pin-spacing-5-08-mm-21-pole-orange-138603</p>
---	--