


Furnizor: **Sc Trivolt Distribution SRL**  
Reg. com.: J23/3300/2016  
CIF: RO36421140  
Adresa: Strada Apusului nr 3 ( primul  
sens giratoriu Tehodor Pallady-  
Autostrada Soarelui), Catelu, Ilfov  
Banca: BRD  
IBAN: RO34BRDE441SV13182234410

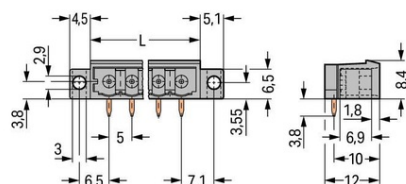

**WAGO THT MALE HEADER; 1.2 X 1.2 MM SOLDER PIN; ANGLED;  
CLAMPING COLLAR; PIN SPACING 5 MM; 5-POLE; GRAY**

Ratings per: IEC/EN 60664-1;  
Tensiune nominala (III/3): 250; V  
Tensiune nominala de supratensiune (III/3): 4; kV  
Tensiune nominala (III/2): 320; V  
Tensiune nominala de supratensiune (III/2): 4; kV  
Tensiune nominala (II/2): 630; V  
Tensiune nominala de supratensiune (II/2): 4; kV  
Curent nominal: 16; A  
Legend (ratings): (III / 2)  $\hat{a}$ %™ Overvoltage category III / Pollution degree 2;  
Tensiune nominala UL (Use Group B): 300; V  
Curent nominal UL (Use Group B): 15; A  
Tensiune nominala UL (Use Group D): 300; V  
Curent nominal UL (Use Group D): 10; A  
Certificari: UL 1059;  
Tensiune nominala UL 1977: 600; V  
Curent nominal UL 1977: 15; A  
Tensiune nominala CSA (Use Group B): 300; V  
Curent nominal CSA (Use Group B): 15; A  
Tensiune nominala CSA (Use Group D): 300; V  
Curent nominal CSA (Use Group D): 10; A  
Numar poli: 5;  
Total number of potentials: 5;  
Numar tipuri de conexiuni: 1;  
Numar nivele: 1;  
Distanta intre pini: 5 mm / 0.197 inch;  
Latime: 37.8 mm / 1.488 inch;  
Inaltime: 12.2 mm / 0.48 inch;  
Inaltime de la fata: 8.4 mm / 0.331 inch;  
Adancime: 12 mm / 0.472 inch;  
Lungimea pinului de contact: 3,8; mm  
Solder pin dimensions: 1.2 x 1.2 mm;  
Diametrul de gaurire cu toleranta: 1.7 (+0.1) mm;  
Tip montaj: Mounting flange;  
Tip montaj: Feed-through mounting; Panel mounting;  
Tip contact (pluggable connector): Conector tata/fisa;  
Connector (connection type): for PCBs;  
Mismating protection: No;  
Mating direction to the PCB: 0; °  
PCB contact: THT;  
Solder pin arrangement: over the entire male connector, in line;  
Number of solder pins per potential: 1;  
Culoare: gray;  
Material group: I;  
Material izolator: Polyamide 66 (PA 66);  
Flammability class per UL94: V0;  
Contact material: Cupru electrolitic (ECu);  
Contact plating: tin-plated;  
Fire load: 0,041; MJ  
Greutate: 2,3; g  
Temperatura lucru: -60 ... +100 °C;  
Product Group: 3 (Multi Conn. System);  
Tip ambalare: BOX;  
Tara de origine: PL;  
GTIN: 4045454644819;  
Customs tariff number: 85366990990;  
Pret: 8,96 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/tht-male-header-1-2-x-1-2-mm-solder-pin-angled-clamping-collar-pin-spacing-5-mm-5-pole-gray-138647>