


Furnizor: **Sc Trivolt Distribution SRL**  
Reg. com.: J23/3300/2016  
CIF: RO36421140  
Adresa: Strada Apusului nr 3 ( primul  
sens giratoriu Tehodor Pallady-  
Autostrada Soarelui), Catelu, Ilfov  
Banca: BRD  
IBAN: RO34BRDE441SV13182234410

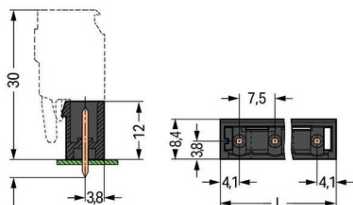

**WAGO THR MALE HEADER; 1.2 X 1.2 MM SOLDER PIN; STRAIGHT;  
IN TAPE-AND-REEL PACKAGING; PIN SPACING 7.5 MM; 4-POLE;  
BLACK**

Ratings per: IEC/EN 60664-1;  
Tensiune nominala (III/3): 500; V  
Tensiune nominala de supratensiune (III/3): 6; kV  
Tensiune nominala (III/2): 630; V  
Tensiune nominala de supratensiune (III/2): 6; kV  
Tensiune nominala (II/2): 1000; V  
Tensiune nominala de supratensiune (II/2): 6; kV  
Curent nominal: 16; A  
Legend (ratings): (III / 2)  $\hat{=}$   $\%$ ™ Overvoltage category III / Pollution degree 2;  
Tensiune nominala UL (Use Group B): 300; V  
Curent nominal UL (Use Group B): 10; A  
Tensiune nominala UL (Use Group D): 300; V  
Curent nominal UL (Use Group D): 10; A  
Certificari: UL 1059;  
Tensiune nominala UL 1977: 600; V  
Curent nominal UL 1977: 15; A  
Tensiune nominala CSA (Use Group B): 300; V  
Curent nominal CSA (Use Group B): 10; A  
Tensiune nominala CSA (Use Group D): 300; V  
Curent nominal CSA (Use Group D): 10; A  
Numar poli: 4;  
Total number of potentials: 4;  
Numar tipuri de conexiuni: 1;  
Numar nivele: 1;  
Distanta intre pini: 7.5 mm / 0.295 inch;  
Latime: 30.7 mm / 1.209 inch;  
Inaltime: 14.4 mm / 0.567 inch;  
Inaltime de la fata: 12 mm / 0.472 inch;  
Adancime: 8.4 mm / 0.331 inch;  
Lungimea pinului de contact: 2,4; mm  
Solder pin dimensions: 1.2 x 1.2 mm;  
Diametru placat prin gaura (THR): 1.7 (+0.1) mm;  
Reel diameter of tape-and-reel packaging: 330; mm  
Tape Latime: 56; mm  
Tip contact (pluggable connector): Conector tata/fisa;  
Connector (connection type): for PCBs;  
Mismatching protection: No;  
Mating direction to the PCB: 90; °  
PCB contact: THR;  
Solder pin arrangement: over the entire male connector, in line;  
Number of solder pins per potential: 1;  
Culoare: black;  
Material group: I;  
Material izolator: Polyphthalamide (PPA GF);  
Flammability class per UL94: V0;  
Contact material: Cupru electrolitic(ECu);  
Contact plating: tin-plated;  
Fire load: 0,047; MJ  
Greutate: 1,7; g  
Temperatura lucru: -60 ... +100 °C;  
Tip ambalare: bag;  
Tara de origine: DE;  
GTIN: 4050821004158;  
Customs tariff number: 85366990990;  
Pret: 9,79 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/thr-male-header-1-2-x-1-2-mm-solder-pin-straight-in-tape-and-reel-packaging-pin-spacing-7-5-mm-4-pole-black-138830>