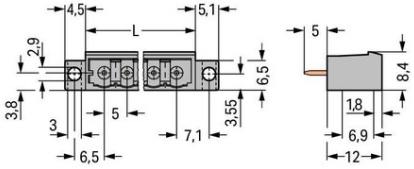


Furnizor: **Sc Trivolt Distribution SRL**  
Reg. com.: J23/3300/2016  
CIF: RO36421140  
Adresa: Strada Apusului nr 3 ( primul  
sens giratoriu Tehodor Pallady-  
Autostrada Soarelui), Catelu, Ilfov  
Banca: BRD  
IBAN: RO34BRDE441SV13182234410

	<p><b>WAGO THT MALE HEADER; 1.0 X 1.0 MM SOLDER PIN; STRAIGHT; CLAMPING COLLAR; PIN SPACING 5 MM; 3-POLE; GRAY</b></p> <p>Ratings per: IEC/EN 60664-1; Tensiune nominala (III/3): 320; V Tensiune nominala de supratensiune (III/3): 4; kV Tensiune nominala (III/2): 320; V Tensiune nominala de supratensiune (III/2): 4; kV Tensiune nominala (II/2): 630; V Tensiune nominala de supratensiune (II/2): 4; kV Curent nominal: 12; A Legend (ratings): (III / 2) %™ Overvoltage category III / Pollution degree 2; Tensiune nominala UL (Use Group B): 300; V Curent nominal UL (Use Group B): 10; A Tensiune nominala UL (Use Group D): 300; V Curent nominal UL (Use Group D): 10; A Certificari: UL 1059; Tensiune nominala UL 1977: 600; V Curent nominal UL 1977: 10; A Tensiune nominala CSA (Use Group B): 300; V Curent nominal CSA (Use Group B): 10; A Tensiune nominala CSA (Use Group D): 300; V Curent nominal CSA (Use Group D): 10; A Numar poli: 3; Total number of potentials: 3; Numar tipuri de conexiuni: 1; Numar nivele: 1; Distanta intre pini: 5 mm / 0.197 inch; Latime: 27,8 mm / 1.094 inch; Inaltime: 17 mm / 0.669 inch; Inaltime de la fata: 12 mm / 0.472 inch; Adancime: 8,4 mm / 0.331 inch; Lungimea pinului de contact: 5; mm Solder pin dimensions: 1 x 1 mm; Diametrul de gaurire cu toleranta: 1,4 (+0,1) mm; Tip montaj: Mounting flange; Tip montaj: Feed-through mounting; Panel mounting; Tip contact (pluggable connector): Conector tata/fisa; Connector (connection type): for PCB; Mismatching protection: No; Mating direction to the PCB: 90; ° PCB contact: THT; Solder pin arrangement: over the entire male connector (in-line); Number of solder pins per potential: 1; Culoare: gray; Material group: I; Material izolator: Polyamide 66 (PA 66); Flammability class per UL94: V0; Contact material: Cupru electrolitic(ECu); Contact plating: tin-plated; Fire load: 0,037; MJ Greutate: 1,6; g Temperatura lucru: -60 ... +100 °C; Product Group: 3 (Multi Conn. System); Tip ambalare: BOX; Tara de origine: PL; GTIN: 4044918922869; Customs tariff number: 85366990990; Pret: 5,73 lei (TVA inclus)</p> <p>Detalii online: <a href="https://www.materialelectrice.ro/tht-male-header-1-0-x-1-0-mm-solder-pin-straight-clamping-collar-pin-spacing-5-mm-3-pole-gray-139014">https://www.materialelectrice.ro/tht-male-header-1-0-x-1-0-mm-solder-pin-straight-clamping-collar-pin-spacing-5-mm-3-pole-gray-139014</a></p>
-----------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------