


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

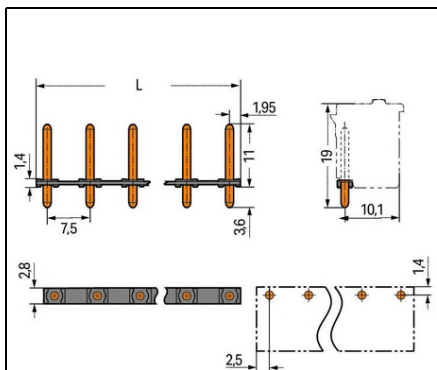

**WAGO SOLDER PIN STRIP; 1.4 MM Ø SOLDER PIN; STRAIGHT; PIN
SPACING 7.5 MM; 2-POLE; BLACK**

Ratings per: IEC/EN 60664-1;
Tensiune nominala (III/3): 400; V
Tensiune nominala de supratensiune (III/3): 6; kV
Tensiune nominala (III/2): 630; V
Tensiune nominala de supratensiune (III/2): 6; kV
Tensiune nominala (II/2): 1000; V
Tensiune nominala de supratensiune (II/2): 6; kV
Curent nominal: 16; A
Legend (ratings): (III / 2) % Overvoltage category III / Pollution degree 2;
Certificari: UL 1059;
Numar poli: 2;
Numar tipuri de conexiuni: 1;
Numar nivele: 1;
Distanta intre pini: 7.5 mm / 0.295 inch;
Latime: 17.9 mm / 0.705 inch;
Inaltime: 14.6 mm / 0.575 inch;
Inaltime de la fata: 11 mm / 0.433 inch;
Adancime: 2.8 mm / 0.110 inch;
Lungimea pinului de contact: 3,6; mm
Diametrul pinului de contact: 1,4; mm
Diametrul de gaurire cu toleranta: 1.6 (+0.1) mm;
Tip contact (pluggable connector): Conector tata/fisa;
Connector (connection type): for PCBs;
Mismatching protection: No;
Mating direction to the PCB: 90; °
PCB contact: THT;
Culoare: black;
Material group: I;
Material izolator: Polyphthalamide (PPA GF);
Flammability class per UL94: V0;
Contact material: Cupru electrolitic(ECu);
Contact plating: tin-plated;
Greutate: 0,4; g
Temperatura lucru: -60 ... +100 °C;
Tip ambalare: bag;
Tara de origine: CN;
GTIN: 4055143934893;
Customs tariff number: 85369010000;
Pret: 2,93 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/solder-pin-strip-1-4-mm-oe-solder-pin-straight-pin-spacing-7-5-mm-2-pole-black-139643>