


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

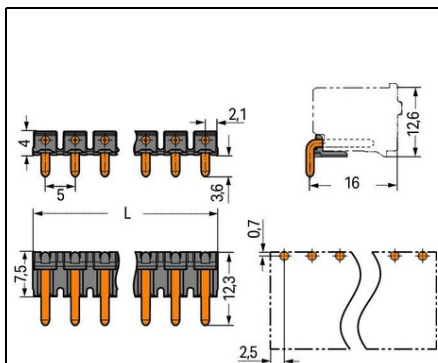

**WAGO SOLDER PIN STRIP; 1.4 MM $\tilde{\sim}$ SOLDER PIN; ANGLED; PIN
SPACING 5 MM; 9-POLE; BLACK**

Ratings per: IEC/EN 60664-1;
Tensiune nominala (III/3): 250; V
Tensiune nominala de supratensiune (III/3): 4; kV
Tensiune nominala (III/2): 320; V
Tensiune nominala de supratensiune (III/2): 4; kV
Tensiune nominala (II/2): 630; V
Tensiune nominala de supratensiune (II/2): 4; kV
Curent nominal: 16; A
Legend (ratings): (III / 2) $\hat{\sim}$ ™ Overvoltage category III / Pollution degree 2;
Certificari: UL 1059;
Numar poli: 9;
Numar tipuri de conexiuni: 1;
Numar nivele: 1;
Distanta intre pini: 5 mm / 0.197 inch;
Latime: 48.2 mm / 1.898 inch;
Inaltime: 7.6 mm / 0.299 inch;
Inaltime de la fata: 4 mm / 0.157 inch;
Adancime: 12.3 mm / 0.484 inch;
Lungimea pinului de contact: 3,6; mm
Diametrul pinului de contact: 1,4; mm
Diametrul de gaurire cu toleranta: 1.6 (+0.1) mm;
Tip contact (pluggable connector): Conector tata/fisa;
Connector (connection type): for PCBs;
Mismatching protection: No;
Mating direction to the PCB: 0; °
PCB contact: THT;
Culoare: black;
Material group: I;
Material izolator: Polyphthalamide (PPA GF);
Flammability class per UL94: V0;
Contact material: Cupru electrolitic(ECu);
Contact plating: tin-plated;
Greutate: 2,5; g
Temperatura lucru: -60 ... +100 °C;
Tip ambalare: bag;
Tara de origine: CN;
GTIN: 4055143934701;
Customs tariff number: 85369010000;
Pret: 8,36 lei (TVA inclus)

Detalii online: <https://www.materialeelectrice.ro/solder-pin-strip-1-4-mm-oe-solder-pin-angled-pin-spacing-5-mm-9-pole-black-139744>