


Furnizor: **Sc Trivolt Distribution SRL**  
Reg. com.: J23/3300/2016  
CIF: RO36421140  
Adresa: Strada Apusului nr 3 ( primul  
sens giratoriu Tehodor Pallady-  
Autostrada Soarelui), Catelu, Ilfov  
Banca: BRD  
IBAN: RO34BRDE441SV13182234410

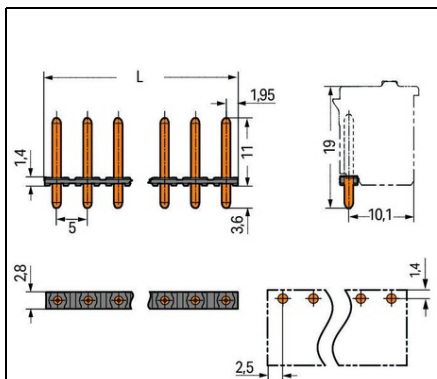

**WAGO SOLDER PIN STRIP; 1.4 MM Ø SOLDER PIN; STRAIGHT; PIN  
SPACING 5 MM; 5-POLE; BLACK**

Ratings per: IEC/EN 60664-1;  
Tensiune nominala (III/3): 250; V  
Tensiune nominala de supratensiune (III/3): 4; kV  
Tensiune nominala (III/2): 320; V  
Tensiune nominala de supratensiune (III/2): 4; kV  
Tensiune nominala (II/2): 630; V  
Tensiune nominala de supratensiune (II/2): 4; kV  
Curent nominal: 16; A  
Legend (ratings): (III / 2) % Overvoltage category III / Pollution degree 2;  
Certificari: UL 1059;  
Numar poli: 5;  
Numar tipuri de conexiuni: 1;  
Numar nivele: 1;  
Distanta intre pini: 5 mm / 0.197 inch;  
Latime: 27.9 mm / 1.098 inch;  
Inaltime: 14.6 mm / 0.575 inch;  
Inaltime de la fata: 11 mm / 0.433 inch;  
Adancime: 2.8 mm / 0.110 inch;  
Lungimea pinului de contact: 3,6; mm  
Diametrul pinului de contact: 1,4; mm  
Diametrul de gaurire cu toleranta: 1.6 (+0.1) mm;  
Tip contact (pluggable connector): Conector tata/fisa;  
Connector (connection type): for PCBs;  
Mismatching protection: No;  
Mating direction to the PCB: 90; °  
PCB contact: THT;  
Culoare: black;  
Material group: I;  
Material izolator: Polyphthalamide (PPA GF);  
Flammability class per UL94: V0;  
Contact material: Cupru electrolitic(ECu);  
Contact plating: tin-plated;  
Greutate: 1,1; g  
Temperatura lucru: -60 ... +100 °C;  
Tip ambalare: bag;  
Tara de origine: CN;  
GTIN: 4055143935562;  
Customs tariff number: 85369010000;  
Pret: 4,65 lei (TVA inclus)

Detalii online: <https://www.materialeelectrice.ro/solder-pin-strip-1-4-mm-oe-solder-pin-straight-pin-spacing-5-mm-5-pole-black-139796>