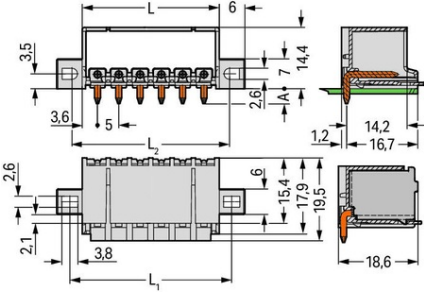


Furnizor: **Sc Trivolt Distribution SRL**  
Reg. com.: J23/3300/2016  
CIF: RO36421140  
Adresa: Strada Apusului nr 3 ( primul  
sens giratoriu Tehodor Pallady-  
Autostrada Soarelui), Catelu, Ilfov  
Banca: BRD  
IBAN: RO34BRDE441SV13182234410

|   |   |
|---|---|
|  <p>Technical drawing of a WAGO THR Male Header. The drawing includes a top view showing four pins with a spacing of 5 mm. Dimensions include: total length L, pin length 6 mm, pin diameter 1.4 mm, pin spacing 5 mm, mounting flange width 3.5 mm, and overall width 14.4 mm. A side view shows the height of the header 16.7 mm and the height of the clamping collar 14.2 mm. A detail view shows the contact tip with a diameter of 1.6 mm and a length of 2.4 mm. Other dimensions include 3.6 mm, 2.6 mm, 7 mm, 1.2 mm, 15.4 mm, 17.9 mm, 19.5 mm, 2.1 mm, and 3.8 mm.</p> | <p><b><u>WAGO THR MALE HEADER; 1.4 MM <math>\tilde{\sim}</math> SOLDER PIN; ANGLED;<br/>CLAMPING COLLAR; PIN SPACING 5 MM; 4-POLE; LIGHT GRAY</u></b></p> <p>Ratings per: IEC/EN 60664-1;<br/>Tensiune nominala (III/3): 250; V<br/>Tensiune nominala de supratensiune (III/3): 4; kV<br/>Tensiune nominala (III/2): 320; V<br/>Tensiune nominala de supratensiune (III/2): 4; kV<br/>Tensiune nominala (II/2): 630; V<br/>Tensiune nominala de supratensiune (II/2): 4; kV<br/>Curent nominal: 16; A<br/>Legend (ratings): (III / 2) <math>\hat{\sim}</math>™ Overvoltage category III / Pollution degree 2;<br/>Tensiune nominala UL (Use Group B): 300; V<br/>Curent nominal UL (Use Group B): 15; A<br/>Tensiune nominala UL (Use Group D): 300; V<br/>Curent nominal UL (Use Group D): 10; A<br/>Certificari: UL 1059;<br/>Numar poli: 4;<br/>Total number of potentials: 4;<br/>Numar tipuri de conexiuni: 1;<br/>Numar nivele: 1;<br/>Distanta intre pini: 5 mm / 0.197 inch;<br/>Latime: 34,2 mm / 1.346 inch;<br/>Inaltime: 16,8 mm / 0.661 inch;<br/>Inaltime de la fata: 14,4 mm / 0.567 inch;<br/>Adancime: 19,5 mm / 0.768 inch;<br/>Lungimea pinului de contact: 2,4; mm<br/>Diametrul pinului de contact: 1,4; mm<br/>Diametru placat prin gaura (THR): 1,6 (+0,1) mm;<br/>Tip montaj: Mounting flange;<br/>Tip montaj: Feed-through mounting; Panel mounting;<br/>Tip contact (pluggable connector): Conector tata/fisa;<br/>Connector (connection type): for PCB;<br/>Mismatching protection: No;<br/>Mating direction to the PCB: 0; °<br/>Locking of plug-in connection: Locking latch;<br/>PCB contact: THR;<br/>Culoare: light gray;<br/>Material group: I;<br/>Material izolator: Polyphthalamide (PPA GF);<br/>Flammability class per UL94: V0;<br/>Contact material: Cupru electrolitic (ECu);<br/>Contact plating: tin-plated;<br/>Fire load: 0,067; MJ<br/>Greutate: 3,1; g<br/>Temperatura lucru: -60 ... +100 °C;<br/>Tip ambalare: BOX;<br/>Tara de origine: DE;<br/>GTIN: 4050821395836;<br/>Customs tariff number: 85366990990;<br/>Pret: 6,81 lei (TVA inclus)</p> <p>Detalii online: <a href="https://www.materialelectrice.ro/thr-male-header-1-4-mm-oe-solder-pin-angled-clamping-collar-pin-spacing-5-mm-4-pole-light-gray-139824">https://www.materialelectrice.ro/thr-male-header-1-4-mm-oe-solder-pin-angled-clamping-collar-pin-spacing-5-mm-4-pole-light-gray-139824</a></p> |
|---|---|