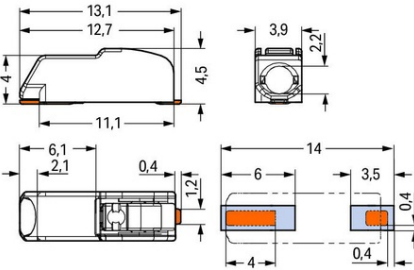


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

	<p>WAGO SMD PCB TERMINAL BLOCK; PUSH-BUTTON; 0.75 MM²; PIN SPACING 4 MM; 1-POLE; PUSH-IN CAGE CLAMP[®]; IN TAPE-AND-REEL PACKAGING; 0.75 MM²; WHITE</p> <p>Ratings per: IEC/EN 60664-1; Tensiune nominala (III/3): 63; V Tensiune nominala de supratensiune (III/3): 2,5; kV Tensiune nominala (III/2): 160; V Tensiune nominala de supratensiune (III/2): 2,5; kV Tensiune nominala (II/2): 320; V Tensiune nominala de supratensiune (II/2): 2,5; kV Curent nominal: 9; A Legend (ratings): (III / 2) $\hat{\%}$™ Overvoltage category III / Pollution degree 2; Certificari: UL 1059; Tensiune nominala UL 1977: 600; V Curent nominal UL 1977: 9; A Tehnologie conexiune: Push-in CAGE CLAMP[®]; Tip actionare: Push-button; Solid conductor: 0.2 ... 0.75 mm² / 24 ... 18 AWG; Fine-stranded conductor: 0.2 ... 0.75 mm² / 24 ... 18 AWG; Fine-stranded conductor; with insulated ferrule: 0.25 ... 0.34 mm²; Fine-stranded conductor; with uninsulated ferrule: 0.25 ... 0.34 mm²; Strip length: 7 ... 9 mm / 0.28 ... 0.35 inch; Conductor connection direction to PCB: 0; ° Numar poli: 1; Numar total de conexiuni: 1; Total number of potentials: 1; Numar tipuri de conexiuni: 1; Numar nivele: 1; Distanta intre pini: 4 mm / 0.157 inch; Latime: 3.9 mm / 0.154 inch; Inaltime: 4.5 mm / 0.177 inch; Adancime: 13.1 mm / 0.516 inch; Reel diameter of tape-and-reel packaging: 330; mm Tape Latime: 24; mm PCB contact: SMD; Culoare: white; Material group: I; Material izolator: Polyphthalamide (PPA GF); Flammability class per UL94: V0; Clamping spring material: Chrome nickel spring steel (CrNi); Contact material: Copper alloy; Contact plating: tin-plated; Greutate: 0,2; g Temperatura lucru: -60 ... +105 °C; Product Group: 33 (Printed Circuit); Tip ambalare: BOX; Tara de origine: CH; GTIN: 4055143541237; Customs tariff number: 85369010000; Pret: 2,03 lei (TVA inclus)</p> <p>Detalii online: https://www.materialelectrice.ro/smd-pcb-terminal-block-push-button-0-75-mm2-pin-spacing-4-mm-1-pole-push-in-cage-clamp-in-tape-and-reel-packaging-0-75-mm2-white-139876</p>
---	--