


Furnizor: **Sc Trivolt Distribution SRL**  
Reg. com.: J23/3300/2016  
CIF: RO36421140  
Adresa: Strada Apusului nr 3 ( primul  
sens giratoriu Tehodor Pallady-  
Autostrada Soarelui), Catelu, Ilfov  
Banca: BRD  
IBAN: RO34BRDE441SV13182234410

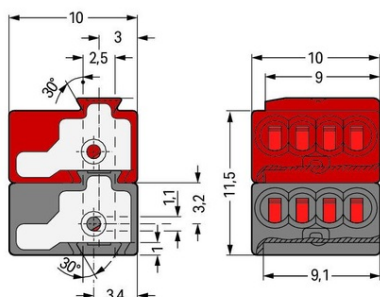

**WAGO 4-CONDUCTOR MODULAR PCB CONNECTOR; FOR  
INDIVIDUAL SOLDER PINS; FOR KNX; 0.8 MM  $\bar{A}$ ; PIN SPACING 5.75  
MM; 2-POLE; DARK GRAY/RED**

Ratings per: IEC/EN 60664-1;  
Tensiune nominala (III/3): 250; V  
Tensiune nominala de supratensiune (III/3): 4; kV  
Tensiune nominala (III/2): 100; V  
Tensiune nominala de supratensiune (III/2): 4; kV  
Tensiune nominala (II/2): 630; V  
Tensiune nominala de supratensiune (II/2): 4; kV  
Curent nominal: 6; A  
Legend (ratings): (III / 2)  $\hat{A}$ ™ Overvoltage category III / Pollution degree 2;  
Certificari: UL 1059;  
Tehnologie conexiune: PUSH WIRE®;  
Conductor diameter: 0,6 ... 0,8 mm;  
Conductor diameter (note): When using different conductor diameters;  
Strip length: 5 ... 6 mm / 0.2 ... 0.24 inch;  
Numar poli: 2;  
Conductor diameter 2: 1 mm;  
Conductor diameter (note) 2: When using identical conductor diameters;  
Numar total de conexiuni: 8;  
Total number of potentials: 2;  
Numar tipuri de conexiuni: 1;  
Numar nivele: 1;  
Latime: 10 mm / 0.394 inch;  
Inaltime: 11,5 mm / 0.453 inch;  
Adancime: 10 mm / 0.394 inch;  
Tip contact (pluggable connector): Conector mama/priza;  
Connector (connection type): for conductor;  
Culoare: dark gray/red;  
Material group: I;  
Material izolator: Polyamide 66 (PA 66);  
Flammability class per UL94: V0;  
Clamping spring material: Chrome nickel spring steel (CrNi);  
Contact material: Cupru electrolitic(ECu);  
Contact plating: tin-plated;  
Fire load: 0,024; MJ  
Greutate: 1,6; g  
Temperatura lucru: -60 ... +105 °C;  
Tip ambalare: BOX;  
Tara de origine: DE;  
GTIN: 4044918442831;  
Customs tariff number: 85369010000;  
Pret: 2,80 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/4-conductor-modular-pcb-connector-for-individual-solder-pins-for-knx-0-8-mm-oe-pin-spacing-5-75-mm-2-pole-dark-gray-red-139903>