


Furnizor: **Sc Trivolt Distribution SRL**  
Reg. com.: J23/3300/2016  
CIF: RO36421140  
Adresa: Strada Apusului nr 3 ( primul  
sens giratoriu Tehodor Pallady-  
Autostrada Soarelui), Catelu, Ilfov  
Banca: BRD  
IBAN: RO34BRDE441SV13182234410

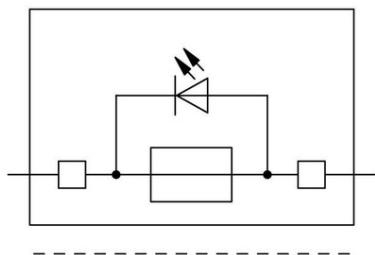

**WAGO 2-CONDUCTOR FUSE TERMINAL BLOCK; WITH PIVOTING  
FUSE HOLDER; FOR 5 X 20 MM MINIATURE METRIC FUSE; WITH  
BLOWN FUSE INDICATION BY LED; 15 - 30 V; FOR DIN-RAIL 35 X 15  
AND 35 X 7.5; 4 MM<sup>2</sup>; CAGE CLAMP®; 4,00 MM<sup>2</sup>; GRAY**

Ratings per: IEC/EN 60947-7-3;  
Tesiune nominala (III/3): 800; V  
Tensiune nominala de supratensiune (III/3): 8; kV  
Curent nominal: 10; A  
Operation status indicator: 15 ... 30 V;  
Legend (ratings): (III / 3) %<sup>TM</sup> Overvoltage category III / Pollution degree 3;  
Tehnologie conexiune: CAGE CLAMP®;  
Tip actionare: Operating tool;  
Connectable conductor materials: Copper; Aluminum;  
Solid conductor: 0,08 ... 4 mm<sup>2</sup> / 28 ... 12 AWG;  
Fine-stranded conductor: 0,08 ... 4 mm<sup>2</sup> / 28 ... 12 AWG;  
Strip length: 9 ... 10 mm / 0.35 ... 0.39 inch;  
Numar total de conexiuni: 2;  
Total number of potentials: 2;  
Numar nivele: 1;  
Wiring type: Front-entry wiring;  
Latime: 8 mm / 0.315 inch;  
Inaltime from upper-edge of DIN-rail: 60 mm / 2.362 inch;  
Adancime: 60 mm / 2.362 inch;  
Design: angled;  
Tip montaj: DIN-35 rail;  
Marking level: Center marking;  
Culoare: gray;  
Material izolator: Polyamide 66 (PA 66);  
Fire load: 0,336; MJ  
Greutate: 17,8; g  
Product Group: 1 (Rail Mounted Terminal Blocks);  
Tip ambalare: BOX;  
Tara de origine: CN;  
GTIN: 4045454871451;  
Customs tariff number: 85369095990;  
Pret: 70,71 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/2-conductor-fuse-terminal-block-with-pivoting-fuse-holder-for-5-x-20-mm-miniature-metric-fuse-with-blown-fuse-indication-by-led-15-30-v-for-din-rail-35-x-15-and-35-x-7-5-4-mm2-cage-clamp-4-00-mm2-gray-139949>