


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

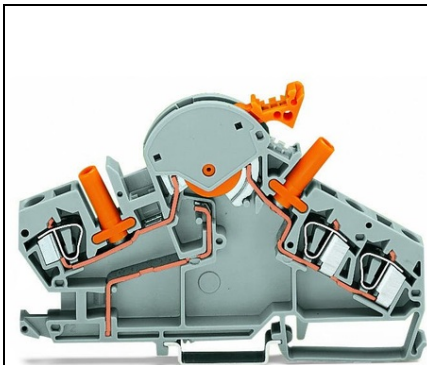

**WAGO 3-CONDUCTOR DISCONNECT/TEST TERMINAL BLOCK; E.G.,
CURRENT TRANSFORMER CIRCUITS; WITH TOUCH-PROOF TEST
SOCKETS; FOR 4 MM $\tilde{\sim}$ TEST PLUGS; FOR DIN-RAIL 35 X 15 AND 35
X 7.5; 6 MM²; CAGE CLAMP[®]; 6,00 MM²; GRAY**

Tensiune nominala (III/3): 500; V
Tensiune nominala de supratensiune (III/3): 6; kV
Curent nominal: 30; A
Legend (ratings): (III / 3) $\hat{\sim}$ ™ Overvoltage category III / Pollution degree 3;
Tehnologie conexiune: CAGE CLAMP[®];
Tip actionare: Operating tool;
Connectable conductor materials: Copper;
Solid conductor: 0,2 ... 6 mm² / 24 ... 10 AWG;
Fine-stranded conductor: 0,2 ... 6 mm² / 24 ... 10 AWG;
Strip length: 12 ... 13 mm / 0.47 ... 0.51 inch;
Numar total de conexiuni: 3;
Total number of potentials: 2;
Numar nivele: 1;
Wiring type: Front-entry wiring;
Latime: 8 mm / 0.315 inch;
Inaltime from upper-edge of DIN-rail: 75 mm / 2.953 inch;
Adancime: 122 mm / 4.803 inch;
Design: angled;
Tip montaj: DIN-35 rail;
Marking level: Center marking;
Culoare: gray;
Material izolator: Polyamide 66 (PA 66);
Fire load: 0,688; MJ
Greutate: 46,8; g
Product Group: 1 (Rail Mounted Terminal Blocks);
Tip ambalare: BOX;
Tara de origine: CN;
GTIN: 4044918692861;
Customs tariff number: 85365080900;
Pret: 65,10 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/3-conductor-disconnect-test-terminal-block-e-g-current-transformer-circuits-with-touch-proof-test-sockets-for-4-mm-oe-test-plugs-for-din-rail-35-x-15-and-35-x-7-5-6-mm2-cage-clamp-6-00-mm2-gray-140116>