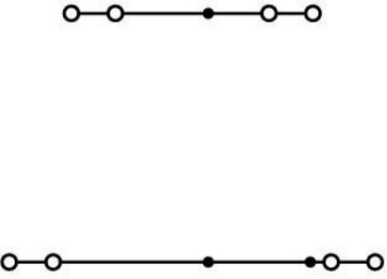


Furnizor: **Sc Trivolt Distribution SRL**
Reg. com.: J23/3300/2016
CIF: RO36421140
Adresa: Strada Apusului nr 3 (primul
sens giratoriu Tehodor Pallady-
Autostrada Soarelui), Catelu, Ilfov
Banca: BRD
IBAN: RO34BRDE441SV13182234410

	<p style="text-align: center;"><u>WAGO 4-CONDUCTOR DOUBLE DECK TERMINAL BLOCK; THROUGH/THROUGH TERMINAL BLOCK; L/L; WITH MARKER CARRIER; FOR DIN-RAIL 35 X 15 AND 35 X 7.5; 2.5 MM²; PUSH-IN CAGE CLAMP®; 2,50 MM²; GRAY</u></p> <p>Ratings per: IEC/EN 60947-7-1; Tensiune nominala (III/3): 800; V Tensiune nominala de supratensiune (III/3): 8; kV Curent nominal: 24; A Curent nominal 2: 28; A Legend (ratings): (III / 3) %^o™ Overvoltage category III / Pollution degree 3; Tensiune nominala UL (Use Group B): 600; V Curent nominal UL (Use Group B): 20; A Tensiune nominala UL (Use Group C): 600; V Curent nominal UL (Use Group C): 20; A Certificari: UL 1059; Tensiune nominala CSA (Use Group B): 600; V Curent nominal CSA (Use Group B): 20; A Tensiune nominala CSA (Use Group C): 600; V Curent nominal CSA (Use Group C): 20; A Tehnologie conexiune: Push-in CAGE CLAMP®; Number of connection points (connection type): 4; Tip actionare: Push-in; Open Tool Slot; Connectable conductor materials: Copper; Nominal cross-section: 2,5 mm²; Solid conductor: 0,25 ... 4 mm² / 22 ... 12 AWG; Solid conductor; push-in termination: 0,75 ... 4 mm² / 18 ... 12 AWG; Fine-stranded conductor: 0,25 ... 4 mm² / 22 ... 12 AWG; Fine-stranded conductor; with insulated ferrule: 1 ... 2,5 mm² / 18 ... 12 AWG; Fine-stranded conductor; with ferrule; push-in termination: 1 ... 2,5 mm² / 18 ... 12 AWG; Strip length: 10 ... 12 mm / 0.39 ... 0.47 inch; Number of connection points: 4; Numar total de conexiuni: 8; Total number of potentials: 2; Numar nivele: 2; Wiring type: Front-entry wiring; Note (conductor cross-section): Depending on the conductor characteristic, a conductor with a smaller cross-section can also be inserted via push-in termination.; Latime: 5,2 mm / 0.205 inch; Inaltime from upper-edge of DIN-rail: 62,7 mm / 2.469 inch; Adancime: 105,1 mm / 4.138 inch; Design: horizontal type; Tip montaj: DIN-35 rail; Potential marking: L/L; Marking level: Center/side marking; Culoare: gray; Material izolator: Polyamide 66 (PA 66); Fire load: 0,308; MJ Greutate: 16,2; g Product Group: 22 (TOPJOB S); Tip ambalare: BOX; Tara de origine: CN; GTIN: 4050821144878; Customs tariff number: 85369010000; Pret: 19,59 lei (TVA inclus)</p> <p>Detalii online: https://www.materialelectrice.ro/4-conductor-double-deck-terminal-block-through-through-terminal-block-l-l-with-marker-carrier-for-din-rail-35-x-15-and-35-x-7-5-2-5-mm2-push-in-cage-clamp-2-50-mm2-gray-140175</p>
-----------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------