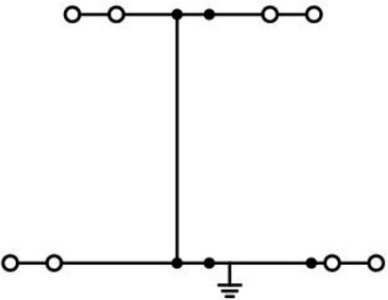


Furnizor: **Sc Trivolt Distribution SRL**  
Reg. com.: J23/3300/2016  
CIF: RO36421140  
Adresa: Strada Apusului nr 3 ( primul  
sens giratoriu Tehodor Pallady-  
Autostrada Soarelui), Catelu, Ilfov  
Banca: BRD  
IBAN: RO34BRDE441SV13182234410

	<p><b>WAGO 4-CONDUCTOR DOUBLE DECK TERMINAL BLOCK; 8-CONDUCTOR GROUND TERMINAL BLOCK; PE; WITHOUT MARKER CARRIER; SUITABLE FOR EX E II APPLICATIONS; INTERNAL COMMONING; FOR DIN-RAIL 35 X 15 AND 35 X 7.5; 2.5 MM<sup>2</sup>; PUSH-IN CAGE CLAMP®; 2,50 MM<sup>2</sup>; GREEN-YELLOW</b></p> <p>Ratings per: IEC/EN 60947-7-2; Tehnologie conexiune: Push-in CAGE CLAMP®; Tip actionare: Push-in; Open Tool Slot; Connectable conductor materials: Copper; Nominal cross-section: 2,5 mm<sup>2</sup>; Solid conductor: 0,25 ... 4 mm<sup>2</sup> / 22 ... 12 AWG; Solid conductor; push-in termination: 0,75 ... 4 mm<sup>2</sup> / 18 ... 12 AWG; Fine-stranded conductor: 0,25 ... 4 mm<sup>2</sup> / 22 ... 12 AWG; Fine-stranded conductor; with insulated ferrule: 1 ... 2,5 mm<sup>2</sup> / 18 ... 12 AWG; Fine-stranded conductor; with ferrule; push-in termination: 1 ... 2,5 mm<sup>2</sup> / 18 ... 12 AWG; Strip length: 10 ... 12 mm / 0.39 ... 0.47 inch; Numar total de conexiuni: 8; Total number of potentials: 1; Numar nivele: 2; Wiring type: Front-entry wiring; Note (conductor cross-section): Depending on the conductor characteristic, a conductor with a smaller cross-section can also be inserted via push-in termination.; Latime: 5,2 mm / 0.205 inch; Inaltime from upper-edge of DIN-rail: 52,1 mm / 2.051 inch; Adancime: 105,1 mm / 4.138 inch; Design: horizontal type; Tip montaj: DIN-35 rail; Potential marking: PE; Marking level: Center/side marking; Culoare: green-yellow; Material izolator: Polyamide 66 (PA 66); Fire load: 0,285; MJ Greutate: 19,2; g Product Group: 22 (TOPJOB S); Tip ambalare: BOX; Tara de origine: CN; GTIN: 4050821145004; Customs tariff number: 85369010000; Pret: 33,91 lei (TVA inclus)</p> <p>Detalii online: <a href="https://www.materialelectrice.ro/4-conductor-double-deck-terminal-block-8-conductor-ground-terminal-block-pe-without-marker-carrier-suitable-for-ex-e-ii-applications-internal-commoning-for-din-rail-35-x-15-and-35-x-7-5-2-5-mm2-push-in-cage-clamp-2-50-mm2-green-yellow-140363">https://www.materialelectrice.ro/4-conductor-double-deck-terminal-block-8-conductor-ground-terminal-block-pe-without-marker-carrier-suitable-for-ex-e-ii-applications-internal-commoning-for-din-rail-35-x-15-and-35-x-7-5-2-5-mm2-push-in-cage-clamp-2-50-mm2-green-yellow-140363</a></p>
---	--