


Furnizor: **Sc Trivolt Distribution SRL**  
Reg. com.: J23/3300/2016  
CIF: RO36421140  
Adresa: Strada Apusului nr 3 ( primul  
sens giratoriu Tehodor Pallady-  
Autostrada Soarelui), Catelu, Ilfov  
Banca: BRD  
IBAN: RO34BRDE441SV13182234410

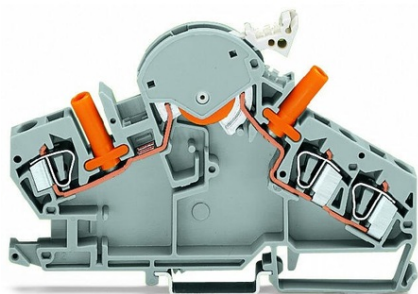

**WAGO 3-CONDUCTOR DISCONNECT/TEST TERMINAL BLOCK; E.G.,  
VOLTAGE TRANSFORMER CIRCUITS; WITH TOUCH-PROOF TEST  
SOCKETS; FOR 4 MM<sup>2</sup> TEST PLUGS; FOR DIN-RAIL 35 X 15 AND 35  
X 7.5; 6 MM<sup>2</sup>; CAGE CLAMP®; 6,00 MM<sup>2</sup>; GRAY**

Tensiune nominala (III/3): 500; V  
Tensiune nominala de supratensiune (III/3): 6; kV  
Curent nominal: 30; A  
Legend (ratings): (III / 3) %™ Overvoltage category III / Pollution degree 3;  
Tehnologie conexiune: CAGE CLAMP®;  
Tip actionare: Operating tool;  
Connectable conductor materials: Copper;  
Solid conductor: 0,2 ... 6 mm<sup>2</sup> / 24 ... 10 AWG;  
Fine-stranded conductor: 0,2 ... 6 mm<sup>2</sup> / 24 ... 10 AWG;  
Strip length: 12 ... 13 mm / 0.47 ... 0.51 inch;  
Numar total de conexiuni: 3;  
Total number of potentials: 2;  
Numar nivele: 1;  
Wiring type: Front-entry wiring;  
Latime: 8 mm / 0.315 inch;  
Inaltime from upper-edge of DIN-rail: 75 mm / 2.953 inch;  
Adancime: 122 mm / 4.803 inch;  
Design: angled;  
Tip montaj: DIN-35 rail;  
Marking level: Center marking;  
Culoare: gray;  
Material izolator: Polyamide 66 (PA 66);  
Fire load: 0,688; MJ  
Greutate: 43,2; g  
Product Group: 1 (Rail Mounted Terminal Blocks);  
Tip ambalare: BOX;  
Tara de origine: CN;  
GTIN: 4044918651325;  
Customs tariff number: 85365080900;  
Pret: 59,95 lei (TVA inclus)

Detalii online: <https://www.materialeelectrice.ro/3-conductor-disconnect-test-terminal-block-e-g-voltage-transformer-circuits-with-touch-proof-test-sockets-for-4-mm-oe-test-plugs-for-din-rail-35-x-15-and-35-x-7-5-6-mm2-cage-clamp-6-00-mm2-gray-140500>